HS-104 Low Power Accelerometer

AC acceleration output via M12 Connector


Key Features


- · Low voltage
- · Ultra low power consumption
- · Customizable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical







Stainless Steel

3.7 oz. (nominal)

PZT/Shear

5.9ft. lbs

Technical Performance

Mounted Base Resonance Sensitivity

Frequency Response Isolation Range

Transverse Sensitivity **Amplitude Linearity**

see 'How To Order' table (nominal) see: 'How To Order' table ±10% Nominal 80Hz at 72°C

18cpm (0.3Hz) to 600kcpm (10kHz) \pm 10% Base isolated see: 'How To Order' table @ 5V power

Less than 5% ±1%

Mechanical

Case Material Sensing Element/Construction Mounting Torque Weight Sheilded Cable Assembly HS-AC010 - straight

HS-AC011 - right angle Mounting Threads see: 'How To Order' table

Electrical

Case Isolation

Electrical Noise Power Requirements **Current Consumption** Bias Voltage Settling Time Output Impedance


< 500µg 5V nominal (other voltages 1.8 to 24V on request) 100µA nominal at 5V supply (60µA at 1.8V) 50% of supply voltage 1 second

100 Ohms max. >108 Ohms at 500 Volts

Environmental

Operating Temperature Range -58 to 257°F Sealing IP67 Maximum Shock 5000g **EMC** EN61326-1:2013

Typical Frequency Response (at 100mV/g)

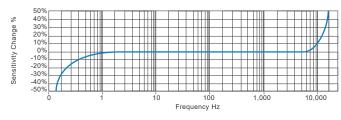


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

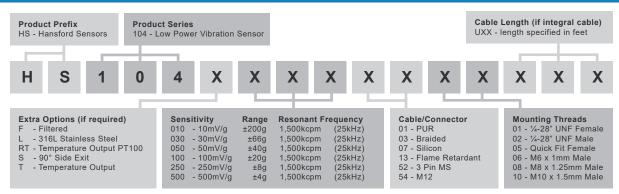



www.hansfordsensors.com sales@hansfordsensors.com

