HS-421 Accelerometer


4-20mA velocity and AC acceleration output via 4 Core Polyolefin HFFR

Key Features

- · Halogen free cable
- Resistant to oil
- For use with PLC/DCS systems and data collectors

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

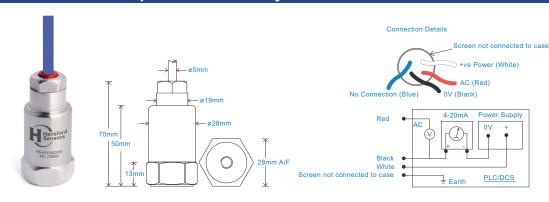

Technical Performance

 $\begin{array}{c} \mbox{Mounted Base Resonance} & 5\mbox{kHz min} \\ \mbox{Velocity Ranges} & \mbox{see: 'How To Order' table $\pm 10\%$} \\ \mbox{Nominal 80Hz at } 22\mbox{°C} \\ \mbox{Frequency Response: } 4\mbox{-}20\mbox{mA} & 10\mbox{Hz (}600\mbox{cpm) to } 1\mbox{kHz (}60\mbox{kpm)} \pm 5\%$} \\ \mbox{- ISO10816} \\ \mbox{Frequency Response: } AC & 2\mbox{Hz (}120\mbox{cpm) to } 1\mbox{kHz (}600\mbox{kpm)} \pm 5\%$} \\ \mbox{- ISO10816} \\ \mbox{Isolation} & \mbox{Base isolated} \\ \mbox{Range} & \mbox{see: 'How To Order' table} \\ \end{array}$

Mechanical

Stainless Steel Case Material Sensing Element/Construction PZT/Compression Mounting Torque 8Nm Weight 150gms (nominal) Maximum Cable Length 1000 metres Standard Cable Length 5 metres Screened Cable Polyolefin HFFR - length to be specified with order see: 'How To Order' table Mounting Threads

Electrical

Transverse Sensitivity

Outputs

4-20mA DC current proportional to Range and AC acceleration

Bias Voltage

3 Volts DC (nominal)

Supply Voltage

15-30 Volts DC (for 4-20mA)

Settling Time

2 seconds

Output Impedance

Loop Resistance 600 Ohms max. at 24 Volts

Case Isolation

>108 Ohms at 500 Volts

Environmental

Less than 5%


 Operating Temperature Range
 -55 to 130°C

 Sealing
 IP68

 Maximum Shock
 5000g

 EMC
 EN61326-1:2013

Typical Frequency Response (4-20mA signal)

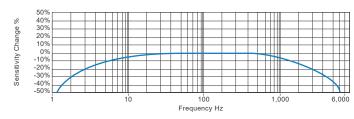


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

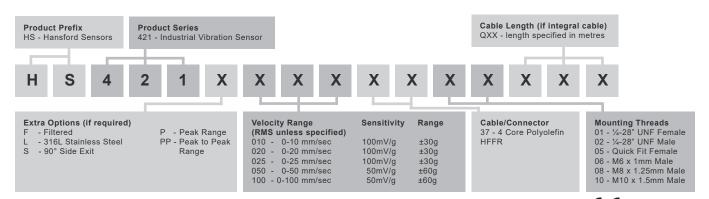



www.hansfordsensors.com sales@hansfordsensors.com

