# **HS-160 Accelerometer**

## AC velocity output via 2 Pin MS Connector


### **Key Features**

- · For use with data collector
- · AC velocity output
- · Customizable features


#### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical





#### Connection Details



#### **Technical Performance**

Mounted Base Resonance Sensitivity

Frequency Response

Isolation Range

Transverse Sensitivity

see 'How To Order' table (nominal) see: 'How To Order' table ±10% Nominal 80Hz at 72°F

180cpm (3Hz) to 270kcpm (4.5kHz) ± 10% 120cpm (2Hz) to 360kcpm (6kHz) ± 3dB

Base isolated see: 'How To Order' table

Less than 5%

0.1mg max

2 seconds

0.5mA to 8mA

10 - 12 Volts DC

200 Ohms max.

>108 Ohms at 500 Volts

#### Mechanical

Case Material Sensing Element/Construction Mounting Torque

Weight

Sheilded Cable Assembly Connector

Mounting Threads

316L Stainless Steel PZT/Compression 5.9ft. lbs

4.4 oz. (nominal)

see: www.hansfordsensors.com for options HS-AA004 - non-booted

HS-AA053 or HS-0054 - booted

see: 'How To Order' table

#### **Electrical**

**Electrical Noise** Current Range Bias Voltage Settling Time **Output Impedance** 

Case Isolation


# Environmental

**Operating Temperature Range** Sealing Maximum Shock **EMC** 

-67 to 284°F IP68 5000g

EN61326-1:2013

### Typical Frequency Response

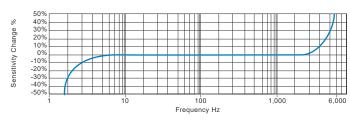


#### **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



## How To Order

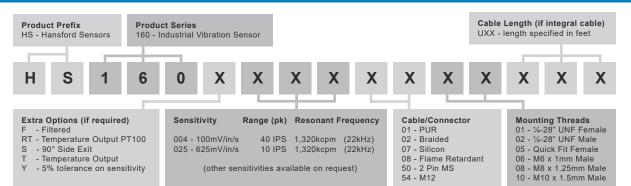



www.hansfordsensors.com sales@hansfordsensors.com

