



## AC acceleration output via 4 Core Polyolefin HFFR

## Key Features

- Halogen free cable
- Resistant to oil
- Premium design

## Industries


Building services, Pulp and Paper,  
Mining, Metals, Utilities, Automotive,  
Water, Pharmaceutical

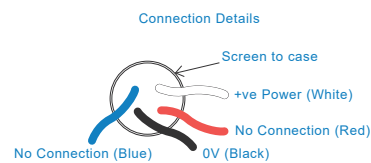

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Shear
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Polyolefin HFFR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-55 to 130°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 <sup>8</sup> Ohms at 500 Volts		


### Typical Frequency Response (at 100mV/g)

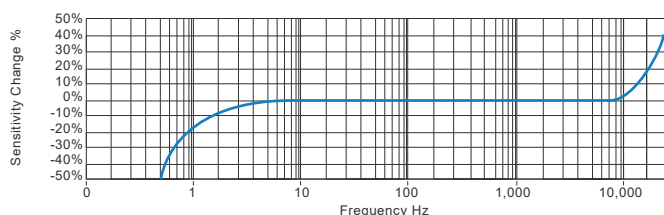

## Applications

Fans, Motors, Pumps, Compressors,  
Centrifuges, Conveyors, Air Handlers,  
Gearboxes, Rolls, Dryers, Presses,  
Cooling, VAC, Spindles, Machine Tooling,  
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



## How To Order

Product Prefix HS - Hansford Sensors		Product Series 150 - Premium Industrial Vibration Sensor							Cable Length (if integral cable) QXX - length specified in metres								
H	S	1	5	0	X	X	X	X	X	X	X	X	X	X			
<b>Extra Options (if required)</b> F - Filtered L - 316L Stainless Steel RT - Temperature Output PT100 S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity		<b>Sensitivity</b> 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g							<b>Range</b> ±800g ±250g ±160g ±80g ±32g ±16g		<b>Resonant Frequency</b> 34kHz (2,040kcpm) 33kHz (1,980kcpm) 32kHz (1,920kcpm) 30kHz (1,800kcpm) 28kHz (1,680kcpm) 26kHz (1,560kcpm)			<b>Cable/Connector</b> 37 - 4 Core Polyolefin HFFR		<b>Mounting Threads</b> 01 - ¼-28" UNF Female 02 - ¼-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male	



www.hansfordsensors.com  
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice.

TS1073.2

