

HS-150T Premium Accelerometer


AC acceleration and temperature output via M12 Connector with Conical Mounting

Key Features


- Temperature output
- Premium design
- M8 Conical Mounting

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

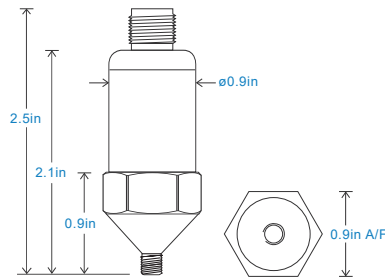

Connection Details

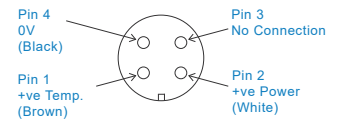

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	90cpm (1.5Hz) to 600kcpm (10kHz) $\pm 5\%$ 30cpm (0.5Hz) to 720kcpm (12kHz) $\pm 10\%$ 12cpm (0.2Hz) to 900kcpm (15kHz) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10 mV/°C standard 212°F - Option 300°F
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	5.9ft. lbs
Weight	4.9 oz. (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	M8 Conical Base


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-67 to 300°F
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

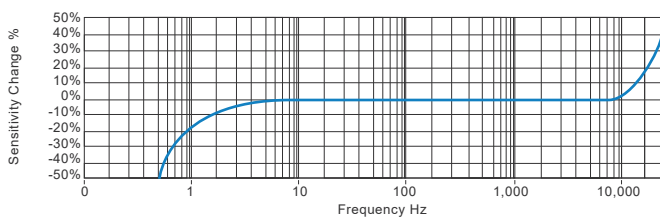

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors		Product Series 150 - Premium Industrial Vibration Sensor									
H	S	1	5	0	T	X	X	X	X	X	X
Extra Options (If required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		2,040kcpm (34kHz)		50 - 2 Pin MS		19 - M8 Conical Base	
HT - High Temperature maximum 300°F		030 - 30mV/g		$\pm 250\text{g}$		1,980kcpm (33kHz)		54 - M12			
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		1,920kcpm (32kHz)					
T - Temperature Output		100 - 100mV/g		$\pm 80\text{g}$		1,800kcpm (30kHz)					
Y - 5% tolerance on sensitivity		250 - 250mV/g		$\pm 32\text{g}$		1,680kcpm (28kHz)					
		500 - 500mV/g		$\pm 16\text{g}$		1,560kcpm (26kHz)					



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS1122U.4

