HS-170S Premium Accelerometer

AC acceleration output via 4 Core Polyolefin HFFR


Key Features

- Premium design
- · High Temperature
- Compact design

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical





Technical Performance

Mounted Base Resonance see 'How To Order' table (nominal)
Sensitivity see: 'How To Order' table ±10%
Nominal 80Hz at 22°C
Frequency Response 2Hz (120cpm) to 14kHz (840kcpm) ± 5%
1.5Hz (90cpm) to 16kHz (960kcpm) ± 10%
0.8Hz (48cpm) to 19kHz (1,140kcpm) ± 3dB
Isolation Base isolated
Range see: 'How To Order' table
Transverse Sensitivity Less than 5%

Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Shear Mounting Torque Mounting Bolt Provided see: 'How To Order' table x 30mm long Weight 135gms (nominal) body only Maximum Cable Length 1000 metres Standard Cable Length Screened Cable Polyolefin HFFR - length to be specified with order Mounting Threads see: 'How To Order' table

Electrical

 Electrical Noise
 0.1mg max

 Current Range
 0.5mA to 8mA

 Bias Voltage
 10 - 12 Volts DC

 Settling Time
 1 second

 Output Impedance
 200 Ohms max.

 Case Isolation
 >108 Ohms at 500 Volts

Environmental


 Operating Temperature Range
 -55 to 130°C

 Sealing
 IP68

 Maximum Shock
 5000g

 EMC
 EN61326-1:2013

Typical Frequency Response (at 100mV/g)




Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

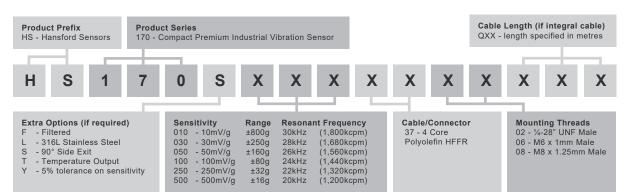



www.hansfordsensors.com sales@hansfordsensors.com

