HS-150 Premium Accelerometer

AC acceleration output via FEP Cable with Protective Conduit

Key Features

- Resistant to oil
- Protective Conduit

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical, Wind



Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table ±10%
	Nominal 80Hz at 72°F
Frequency Response	90cpm (1.5Hz) to 600kcpm (10kHz) ± 5%
	30cpm (0.5Hz) to 720kcpm (12kHz) ± 10%
	12cpm (0.2Hz) to 900kcpm (15kHz) ± 3dB
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	Piezoresistiv/Scherprinzip
Mounting Torque	5.9ft. lbs
Weight	see: 'How To Order' table x 1.2in long
Sheilded Cable Assembly	6.5 oz. (nominal) body only
Maximum Cable Lengths	328ft
Standard Cable Lengths	16ft
Mounting Threads	see 'How To Order' Table
Conduit Material	316 Stainless Steel
Conduit Length	Conduit Length is approx. 1.6ft shorter than the cable
	Maximum Conduit Length:98 ft.

Electrical

Excitation Voltage	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-67 to 300°F
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013

Typical Frequency Response (at 100mV/g)

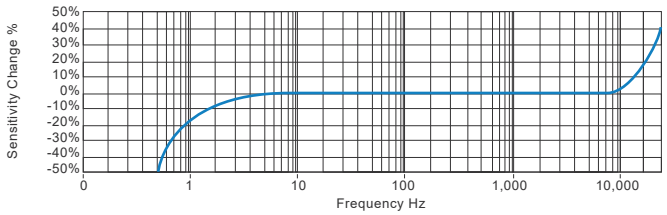

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)

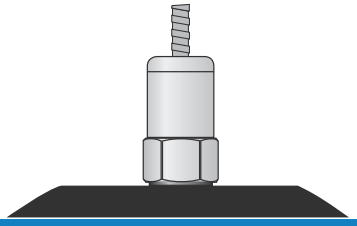

How To Order

Product Prefix
HS - Hansford Sensors

Product Series
150 - Premium Industrial Vibration Sensor

Cable Length (if integral cable)
UXX - length specified in feet

H	S	1	5	0	X	X	X	X	X	X	X	X	X	X	X	X

Extra Options (if required)
F - Filtered
L - 316L Stainless Steel
RT - Temperature Output PT100
S - 90° Side Exit
T - Temperature Output
Y - 5% tolerance on sensitivity

Sensitivity	Range	Resonant Frequency
010 - 10mV/g	±800g	2,040kcpm (34kHz)
030 - 30mV/g	±250g	1,980kcpm (33kHz)
050 - 50mV/g	±160g	1,920kcpm (32kHz)
100 - 100mV/g	±80g	1,800kcpm (30kHz)
250 - 250mV/g	±32g	1,680kcpm (28kHz)
500 - 500mV/g	±16g	1,560kcpm (26kHz)

Cable/Connector
30C - FEP with Protective Conduit

Mounting Threads
01 - ¼-28" UNF Female
02 - ¼-28" UNF Male
05 - Quick Fit Female
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male
10 - M10 x 1.5mm Male

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS785U.7