

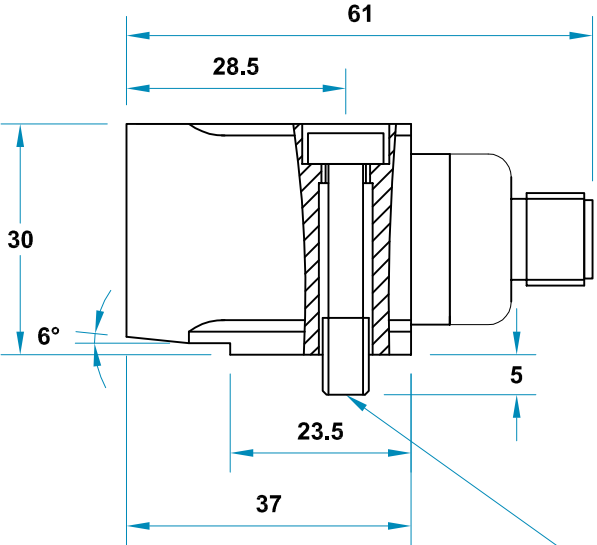


Installation Dimensional Drawing for HS-100S Series M12 Connector

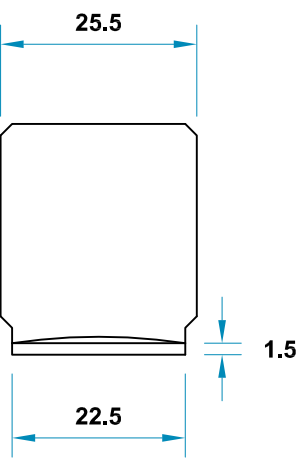


Pin 2 - Signal(+18-30V)

Pin 4 - Common (0V)



- M6 x 1 x 30 Socket Cap Head Bolt
- 1/4"-28UNF x 30 Socket Cap Head Bolt
- M8 x 1.25 x 30 Socket Cap Head Bolt

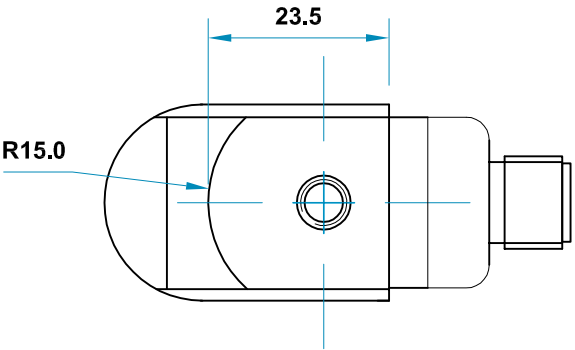


Rev No	DRF No	Date Drg	Drg By	Appd By
A	Release	20/06/11	MJS	CMH
B	DRF0173	08/07/11	MJS	CMH
C	DRF0250	11/09/12	MJS	CMH

Material: N/A	
Tolerances Unless Stated	
0 or 0.0	±0.5
0.00	±0.15
Angle	±5°
Finish All Over	
Threads g6 H6	



Hansford Sensors
Excellence in Vibration Monitoring

Hansford Sensors Ltd
Artisan Hillbottom Road
Sands Industrial Estate
High Wycombe
Bucks HP12 4HJ



Do Not Scale

All Dimensions In mm Unless Otherwise Stated

If In Doubt - Ask!

Description: Installation Dimensional Drawing for HS-100S Series M12 Connector

Drawing No: CD034-11-C

Scale: NTS

Form Number: QF024 Issue 3

Sheet: 1 of 1