

HS-104T Low Power Accelerometer


AC acceleration and temperature output via M12 Connector

Key Features


- Low voltage
- Ultra low power consumption
- Temperature output
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

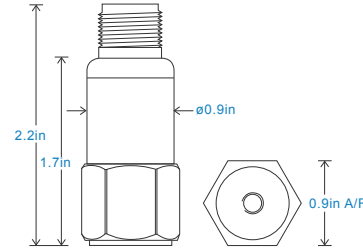

Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	18cpm (0.3Hz) to 600kcpm (10kHz) $\pm 10\%$
Isolation	Base isolated
Range	see: 'How To Order' table @ 5V power
Transverse Sensitivity	Less than 5%
Amplitude Linearity	$\pm 1\%$
Temperature Output	-11 mV/°C standard 212°F - Option 300°F 3.3 volts supply min - output 32°F 2.1 volts 50°F 1.99 volts

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	5.9ft. lbs
Weight	3.7 oz. (nominal) body only
Shielded Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Electrical Noise	< 500 μ g
Power Requirements	5V nominal (other voltages 1.8 to 24V on request)
Current Consumption	100 μ A nominal at 5V supply (60 μ A at 1.8V)
Bias Voltage	50% of supply voltage
Settling Time	1 second
Output Impedance	100 Ohms max.
Case Isolation	>10 ⁸ Ohms at 500 Volts

Environmental

Operating Temperature Range	-58 to 257°F
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

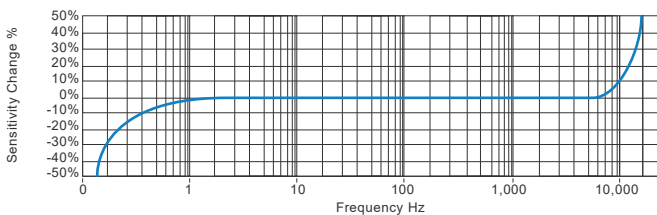

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	104 - Low Power Vibration Sensor										
H	S	1	0	4	T	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		± 200 g		1,500kcpm (25kHz)		01 - PUR		01 - 1/4-28" UNF Female	
L - 316L Stainless Steel		030 - 30mV/g		± 66 g		1,500kcpm (25kHz)		54 - M12		02 - 1/4-28" UNF Male	
RT - Temperature Output PT100		050 - 50mV/g		± 40 g		1,500kcpm (25kHz)				05 - Quick Fit Female	
S - 90° Side Exit		100 - 100mV/g		± 20 g		1,500kcpm (25kHz)				06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		± 8 g		1,500kcpm (25kHz)				08 - M8 x 1.25mm Male	
		500 - 500mV/g		± 4 g		1,500kcpm (25kHz)				10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS797U.4

