

HS-173RT Premium Triaxial Accelerometer



Three AC and PT100 temperature outputs via 6 Pin 62GB connector

Key Features

- Temperature Output
- Output via three axes
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

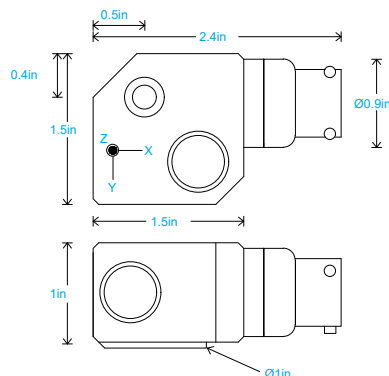

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal) +3kHz for aluminium version
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F per axes
Frequency Response	120cpm (2Hz) to 600kcpm (10kHz) $\pm 5\%$ 90cpm (1.5Hz) to 720kcpm (12kHz) $\pm 10\%$ 48cpm (0.8Hz) to 900kcpm (15kHz) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	PT100 (-58°F to +932°C)
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel unless specified Aluminium
Sensing Element/Construction	PZT/Shear
Mounting Torque	5.9ft. lbs
Mounting Bolt Provided	see: 'How To Order' table x 30mm long
Weight	8.2 oz. (nominal) - Stainless Steel 4 oz. (nominal) - Aluminium
Connector	HS-AA125 Amphenol 62GB-16F10-06SN
Mounting Threads	see: 'How To Order' table
Mounting Stud	HS-AS226, HS-AS221 or HS-AS222


Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-67 to 266°F
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

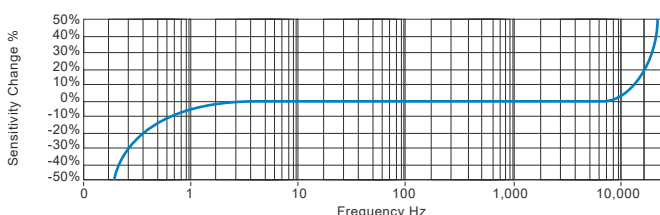

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	173 - Triaxial Industrial Vibration Sensor										
H	S	1	7	3	R	T	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
AL - Aluminium Material		010 - 10mV/g		$\pm 800\text{g}$		1,200kcpm (20kHz)		63 - 6 Pin 62GB		02 - 1/4-28" UNF Male	
F - Filtered		030 - 30mV/g		$\pm 250\text{g}$		1,140kcpm (19kHz)				06 - M6 x 1mm Male	
RT - Temperature Output PT100		050 - 50mV/g		$\pm 160\text{g}$		1,080kcpm (18kHz)				08 - M8 x 1.25mm Male	
T - Temperature Output		100 - 100mV/g		$\pm 80\text{g}$		1,020kcpm (17kHz)					
		250 - 250mV/g		$\pm 32\text{g}$		960kcpm (16kHz)					
		500 - 500mV/g		$\pm 16\text{g}$		900kcpm (15kHz)					



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS855U.8

