
# HS-420I/M Intrinsically Safe Accelerometer 4-20mA velocity output via Flame Retardant Cable

# **Key Features**

- · Intrinsically Safe with European, USA, Australian, South African, and Indian approvals
- Approved SIL 2 and SIL 3
- For use with PLC/DCS systems
- · Low smoke, halogen free cable

#### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

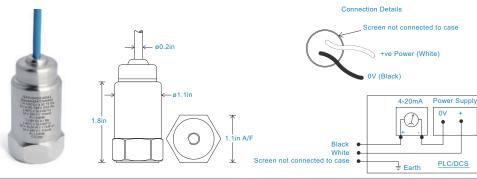

# **Technical Performance**

Mounted Base Resonance 5kHz min Velocity Ranges see: 'How To Order' table ±10% Nominal 80Hz at 72°F 600cpm (10Hz) to 60kcpm (1kHz) ± 5% - ISO10816 Frequency Response Isolation Base isolated 50g peak Range Transverse Sensitivity Less than 5%

# Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Compression Mounting Torque 5.9ft. lbs Weight 5.2 oz. (nominal) Maximum Cable Length 3.280 ft. Standard Cable Length 16 ft. Shielded Cable Flame Retardant - length to be specified with order Mounting Threads see: 'How To Order' table


#### **Electrical**

**Current Output** 4-20mA DC proportional to Velocity Range 15-30 Volts DC (for 4-20mA) Supply Voltage Settling Time **Output Impedance** Loop Resistance 600 Ohms max. at 24 Volts Case Isolation

# Environmental

Operating Temperature Range see: attached certification details **IP65** Sealing Maximum Shock 5000g **EMC** EN61326-1:2013

# Typical Frequency Response

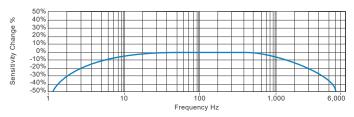

# **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



# Certifications







2 seconds

>108 Ohms at 500 Volts







This product is certified in accordance with UL 913, 8th Ed. Rev. December 6, 2013 CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com sales@hansfordsensors.com



# HS-420I/M Intrinsically Safe Accelerometer

4-20mA velocity output via Flame Retardant Cable

# Intrinsically Safe Requirements

Certificate details: Group II

Maximum Cable Length nominal 100 metres see attached system drawings

Certificate details: Group I + II IECEx BAS08 0034X Baseefa08ATEX0086X

®II 1GD

Ex ia IIC T6 Ga

Ex ia IIIC T80°C IP65 Da

□ I M1

Ex ia I Ma

 $(-40^{\circ}\text{C} \le \text{Ta} \le +60^{\circ}\text{C})$ **⊚II 1GD** 

Ex ia IIC T4 Ga Ex ia IIIC T130°C IP65 Da

 $(-40^{\circ}C \le Ta \le +110^{\circ}C)$ 

Accelerometer System Certificate Baseefa08Y0087

Ex ia IIC T6 (-40°C  $\leq$  Ta  $\leq$  +60°C)

\*On request - consult Sales Office

Terminal Parameters Ui = 28V, Ii = 115mA, Pi = 0.65W Group II

Ui = 16.5V Pi = 0.65W

or Ui = 28V Ii = 115mA Pi = 0.65W Group I

500V Isolation Units Will Pass A 500V Isolation Test

Certified Temperature Range Ex ia IIC T6 Ga (-40°C ≤ Ta ≤ +60°C) (Gas)

Ex ia IIC T4 Ga (- $40^{\circ}$ C  $\leq$  Ta  $\leq$  + $110^{\circ}$ C) (Gas)

Ex ia IIIC T80°C IP65 Da (-40°C  $\leq$  Ta  $\leq$  +60°C) (Dust) Ex ia IIIC T130°C IP65 Da (-40°C  $\leq$  Ta  $\leq$  +110°C) (Dust)

Ex ia I Ma ( $-40^{\circ}$ C  $\leq$  Ta  $\leq$   $+60^{\circ}$ C) (Mining)

Australia Approval Group 1 IECEx ITA 10.0003X

Ex ia I Ma

 $(-40^{\circ}\text{C} \le \text{Ta} \le +60^{\circ}\text{C})$ 

Certificate No. MASC MS/16-0229X South African Approval

Group I and II (As Baseefa/ATEX)

US/Canada Approvals Certificate No. SGSNA/18/SUW/0000231 Class I, II, III, Division 1, 2, Groups A - G, T4, -40°C to +110°C, Class I, Zone 0, AEx, ia, IIC, T4, Ga, -40°C to +110°C

Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -40°C to +110°C

Barrier 1 x Pepperl + Fuchs Galvanic Isolator KFD2-STC4-Ex1, which has superseded KFD2-CR-Ex1.30300 (BAS00ATEX7164)

see attached system drawings

1 x MTL Zener Barrier MTL7787+ (BAS01ATEX7217)

or Pepperl + Fuchs Zener Barrier

Z787 (BAS01ATEX7005) or any other barrier that

conforms to system drawings attached

System Connections for Zener Barrier see attached system drawings

System Connections for Galvanic Isolator see attached system drawings

Terminal Parameters Ui = Vmax = 28V

> Ii = Imax = 115mAPi = 0.65W

Special conditions of safe use for Group II dust.

The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriately certified dust-proof enclosure.

The unit has no serviceable parts.

### **How To Order**

