HS-100T Accelerometer

AC acceleration and temperature output via Braided Cable


Key Features


- Temperature output
- · For use with data collector
- · Customizable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical







Technical Performance

Mounted Base Resonance see 'How To Order' table (nominal) Sensitivity see: 'How To Order' table ±10% Nominal 80Hz at 72°F Frequency Response 120cpm (2Hz) to 600kcpm (10kHz) ± 5% 90cpm (1.5Hz) to 720kcpm (12kHz) ± 10% 48cpm (0.8Hz) to 900kcpm (15kHz) ± 3dB Isolation Base isolated Range see: 'How To Order' table Temperature Output 10 mV/°C standard 212°F - Option 284°F Transverse Sensitivity Less than 5%

Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Compression Mounting Torque 5.9ft. lbs 4.4 oz. (nominal) Weight 3,280 ft. Maxiumum Cable Length Standard Cable Length 16 ft. Shielded Cable Braided - length to be specified with order Mounting Threads see: 'How To Order' table


Electrical

Electrical Noise 0.1mg max Current Range 0.5mA to 8mA Bias Voltage 10 - 12 Volts DC Settling Time 2 seconds 200 Ohms max. Output Impedance Case Isolation >108 Ohms at 500 Volts

Environmental

Operating Temperature Range -67 to 284°F IP65 Sealing Maximum Shock 5000g **EMC** EN61326-1:2013

Typical Frequency Response (at 100mV/g)

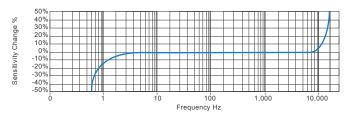


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

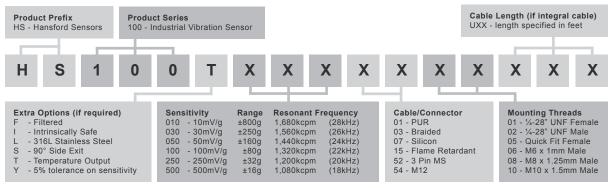



www.hansfordsensors.com sales@hansfordsensors.com

