


AC acceleration output via 2 Pin MS Connector

Key Features


- Line Drive
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical, Wind

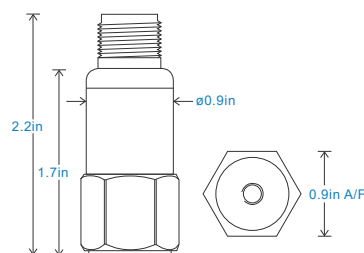


Connection Details



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 72°F	Mounting Torque	5.9ft.lbs
Frequency Response	120cpm (2Hz) to 600kcpm (10kHz) $\pm 5\%$	Weight	3.7 oz. (nominal) body only
	90cpm (1.5Hz) to 720kcpm (12kHz) $\pm 10\%$	Screened Cable Assembly	see: www.hansfordsensors.com for options
	48cpm (0.8Hz) to 900kcpm (15kHz) $\pm 3\text{dB}$	Connector	HS-AA004 - non-booted
Isolation	Base isolated		HS-AA053 or HS-AA054 - booted
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Electrical Noise	0.1mg max	Operating Temperature Range	-67 to 284°F
Supply Voltage	7.5 - 24Volts DC	Sealing	IP68
Bias Current	3.5mA	Maximum Shock	5000g
Settling Time	2 seconds	EMC	EN61326-1:2013
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

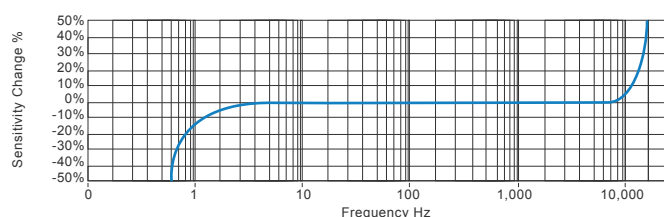


Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

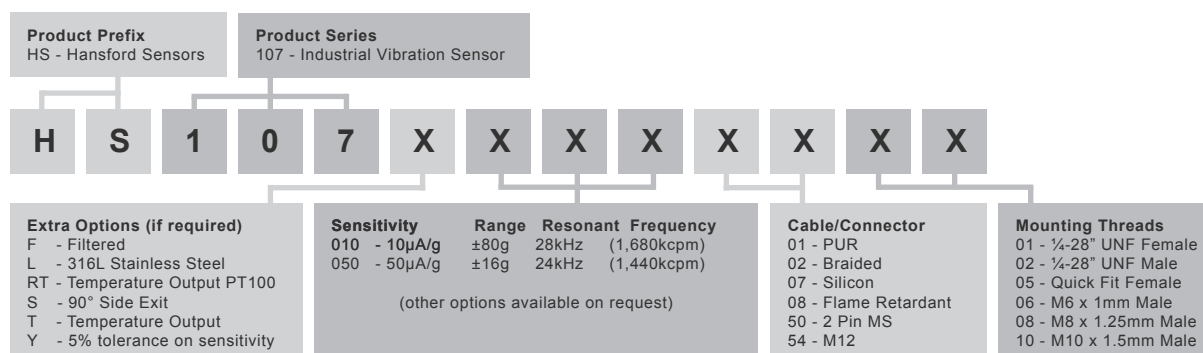

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS1007U.3

