

HS-421SRT Accelerometer


4-20mA velocity, AC acceleration and PT100 temperature output via 5 Pin M12 Connector

Key Features

- Unique output
- For use with PLC/DCS systems and data collectors
- Side entry for easy access

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

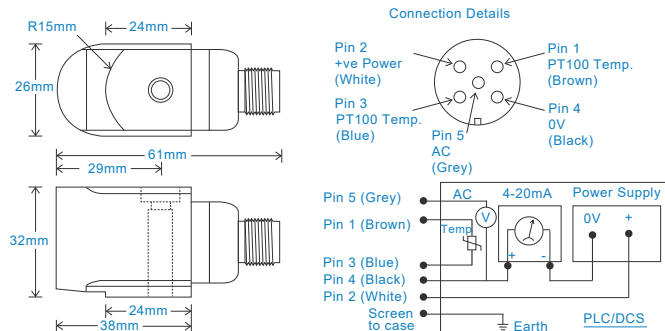

Technical Performance

Mounted Base Resonance	5kHz min
Velocity Ranges	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response: 4-20mA	10Hz (600cpm) to 1kHz (60kcpm) $\pm 5\%$ - ISO10816
Frequency Response: AC	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ - ISO10816
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	PT100(100 Ohms)
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Mounting Bolt Provided	see: 'How To Order' table x 35mm long
Weight	185gms (nominal) body only
Screened Cable Assembly	HS-AC303 - straight HS-AC032 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Outputs	4-20mA DC current proportional to Range and AC acceleration
Bias Voltage	3 Volts DC (nominal)
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	1 second
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-25 to 90°C
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (4-20mA signal)

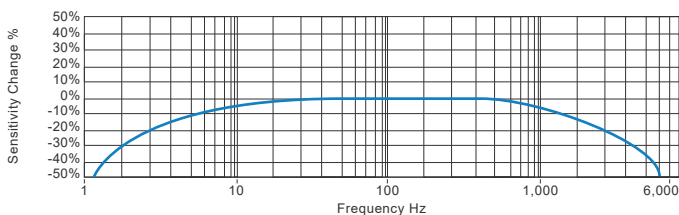

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series													
HS - Hansford Sensors		421 - Industrial Vibration Sensor													
H	S	4	2	1	S	R	T	X	X	X	X	X	X		
Extra Options (if required)							Velocity Range (RMS unless specified)		Sensitivity		Range		Cable/Connector	Mounting Threads	
F - Filtered					P - Peak Range		010 - 0-10 mm/sec		100mV/g		±80g		53 - 5 Pin M12		02 - ¼-28" UNF Male
L - 316L Stainless Steel					PP - Peak to Peak Range		020 - 0-20 mm/sec		100mV/g		±80g				06 - M6 x 1mm Male
RT - Temperature Output PT100							025 - 0-25 mm/sec		100mV/g		±80g				08 - M8 x 1.25mm Male
S - 90° Side Exit							050 - 0-50 mm/sec		100mV/g		±80g				
T - Temperature Output							100 - 0-100 mm/sec		100mV/g		±80g				



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS1101.3

