



AC acceleration output via Braided Cable

Key Features

- For use with data collector
- Side entry for easy access
- Filtered output

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

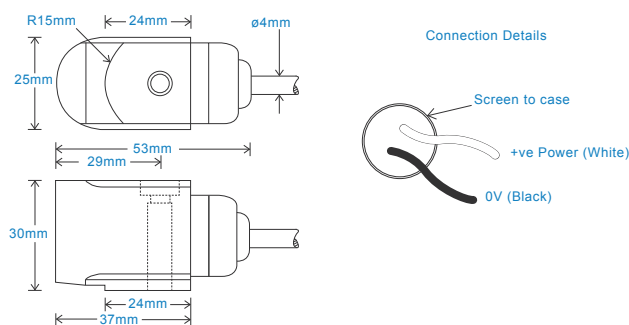

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Mounting Bolt provided	see: 'How To Order' table x 30mm long
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Weight	185gms (nominal) body only
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Maximum Cable Length	1000 metres
Isolation	Base isolated	Standard Cable Length	5 metres
Range	see: 'How To Order' table	Screened Cable	Braided - length to be specified with order
Transverse Sensitivity	Less than 5%	Mounting Threads	see: 'How To Order' table


Electrical		Environmental	
Excitation Voltage	18-30Volts DC	Operating Temperature Range	-55 to 140°C
Electrical Noise	0.1mg max	Sealing	IP65
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		

Typical Frequency Response (at 100mV/g)

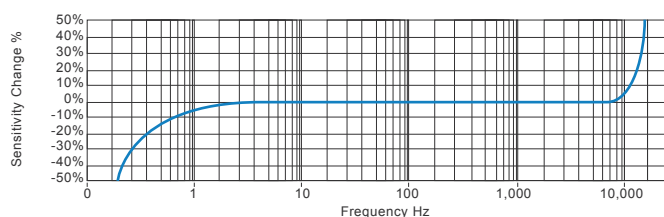

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

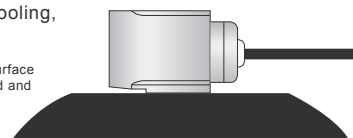

How To Order

Product Prefix
HS - Hansford Sensors

Product Series
100 - Industrial Vibration Sensor

Cable Length
QXX - length specified in metres

Extra Options (if required)
F - Filtered
L - 316L Stainless Steel
RT - Temperature Output PT100
S - 90° Side Exit
T - Temperature Output
Y - 5% tolerance on sensitivity

Sensitivity
010 - 10mV/g
030 - 30mV/g
050 - 50mV/g
100 - 100mV/g
250 - 250mV/g
500 - 500mV/g

Range
±800g
±250g
±160g
±80g
±32g
±16g

Resonant Frequency
27kHz (1,620kcpm)
25kHz (1,500kcpm)
23kHz (1,380kcpm)
21kHz (1,260kcpm)
19kHz (1,140kcpm)
17kHz (1,020kcpm)

Cable/Connector
01 - PUR
02 - Braided
07 - Silicon
08 - Flame Retardant
50 - 2 Pin MS
54 - M12

Mounting Threads
02 - ¼-28" UNF Male
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS138.7

