




Connection Details of Cable Assembly

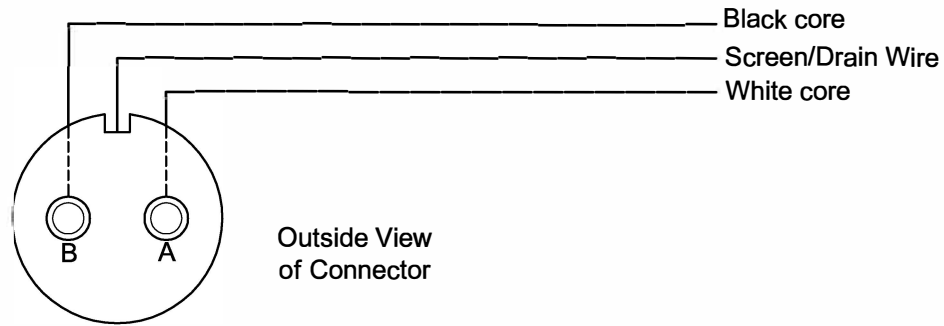

Inside View of Cable

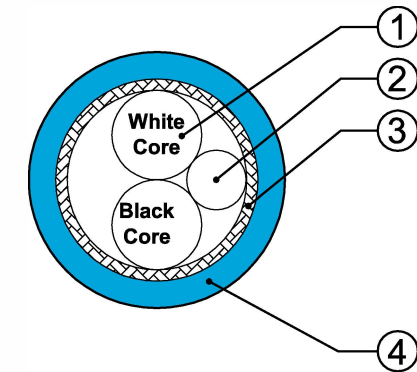

**2 Pin MS Overmoulded
Right Angle Straight
Socket Connector with
316 Stainless Steel
Locking Ring**



**Connector sealed to IP67 only when
connected to the accelerometer.**

Environment Specification of Cable Assembly
Maximum operating temperature of 150°C with
high levels of resistance to chemical attack.


Free end

Black core
White core
Screen


Materials of Cable: High Temperature FEP Cable				
Pos	Description	Dimension	Overall Diameter	Remarks
1.	Tin plated copper conductor insulation of FEP	20 AWG	Copper 0.96 Insulation 1.47	19 x 0.2
2.	Tin plated copper drain wire	20 AWG	0.96	19 x 0.2
3.	Braided screen of tin plated copper wire	16 x 6 x 0.127	3.3.8	Optimised: 85% min
4.	Jacket of FEP, blue	Thickness 0.35mm	4.5	Tube-Extruded

Technical Data of Cable		
Technical Data	Values at 20°C	Unit
Conductor Resistance	34	Ω / km
Insulation Resistance	>5000	MΩ x km
Test Voltage	3	KV DC
Voltage Rating	600/1000	V AC
Capacitance	Core-core: 85	pF / m
Inductance	0.54	1kHz μH/m
L/R Ratio	7.94	μH/Ω
Weight	40	g / m
Temperature Rating	-80 / +200	°C


Connection Details of Cable Assembly

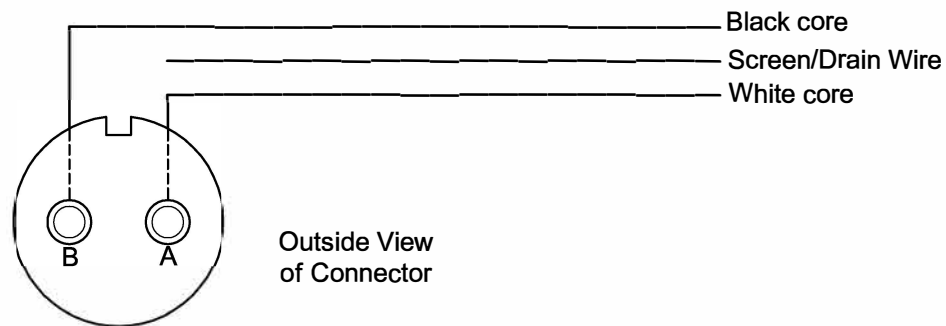

Inside View of Cable

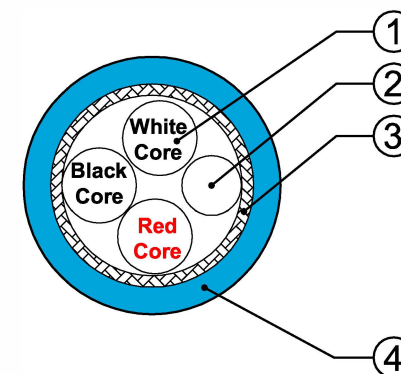

Connector sealed to IP67 only when connected to the accelerometer.



Environment Specification of Cable Assembly

Maximum operating temperature of 150°C with high levels of resistance to chemical attack.

Free end

Black core

White core

Screen Not Connected to case

Materials of Cable: High Temperature FEP Cable

Pos	Description	Dimension	Overall Diameter	Remarks
1.	Tin plated copper conductor insulation of FEP	20 AWG	Copper 0.96 Insulation 1.47	19 x 0.2
2.	Tin plated copper drain wire	20 AWG	3,8	Optimised: 85% min
3.	Braided screen of tin plated copper wire		3.1	
4.	Jacket of FEP, blue	Thickness 0.35mm	4.5	Tube-Extruded

Technical Data of Cable

Technical Data	Values at 20°C	Unit
Conductor Resistance	34	Ω / km
Insulation Resistance	>5000	MΩ x km
Capacitance	Nom: 89	pF/m
Test Voltage	3	KV DC
Voltage Rating	600/1000	V AC
Capacitance	Core-core: 90	pF / m
Weight	40	g / m
Temperature Rating	-80 / +200	°C