


Cross Sectional View of Cable

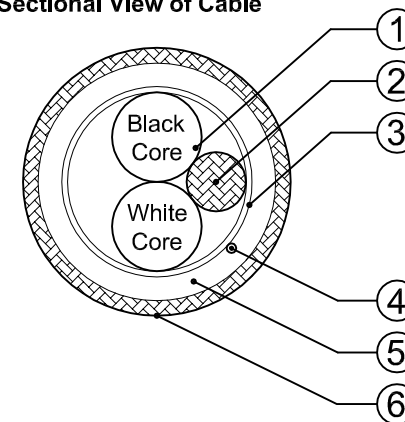


Environment Specification of Cable Assembly


Maximum operating temperature of 150°C with high levels of resistance to chemical attack.

2 Pin MS Connector inside Protective Rubber Boot.

Connector sealed to IP66 only when connected to the accelerometer.

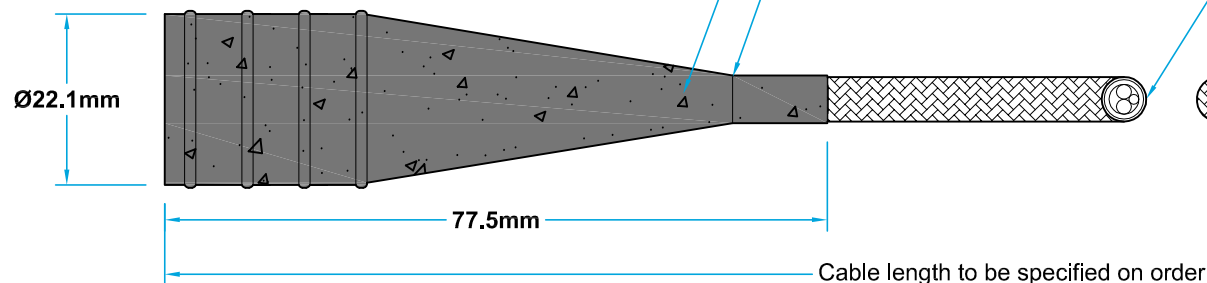

BNC Connector with dustcap and 90° Bracket

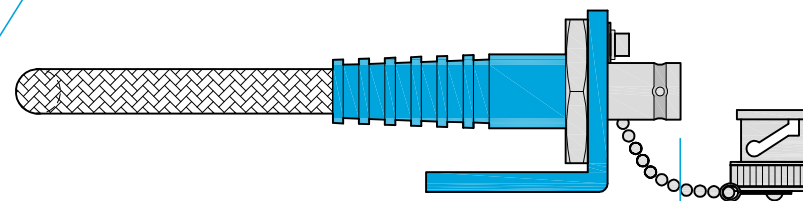


Materials of Cable: C01-002 Overbraided ETFE Cable


Pos	Description	Dimension	Overall Diameter	Remarks
1.	Tin plated copper conductor insulation of ETFE	20 AWG 0,17	0,96 1,30	19 x 0,20 (0,6mm ²)
2.	Screen wire of tin plated copper	20 AWG	0,96	19 x 0,20 (0,6mm ²)
3.	Wrapped aluminium polyester foil screen		2,8	Coverage: 100%
4.	Kevlar tear-thread			
5.	Jacket of FEP, black	0,45	3,7	
6.	Braided armour of stainless steel wire	16 x 7 x 0,12 Lay = 11,8 Angle = 46,6	4,2 nom	Nom. Coverage: 95%

Technical Data of Cable

Technical Data	Values at 20°C	Unit
Conductor resistance	Max: 32,4	Ω / km
Insulation resistance	>1500	MΩ x km
Test voltage	3	KV DC
Voltage rating	600	V AC
Capacitance	Core-core: 165 ± 10%	nF / km
	Core-screen: 310 ± 10%	
Impedance	Core-core: 33 ± 10%	Ω
	Core-screen: 18 ± 10%	
Radiation tolerance	10 E4	Gy
Weight	45	g / m
Temperature rating	-65 / +150	°C

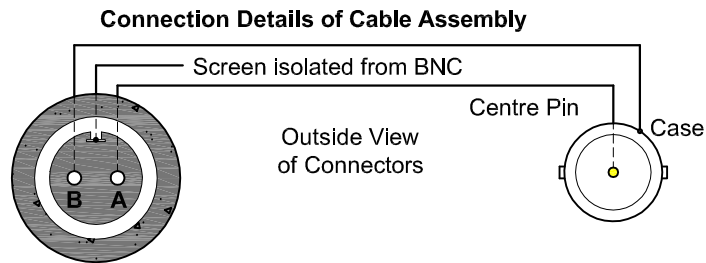


Cross Sectional View of Cable

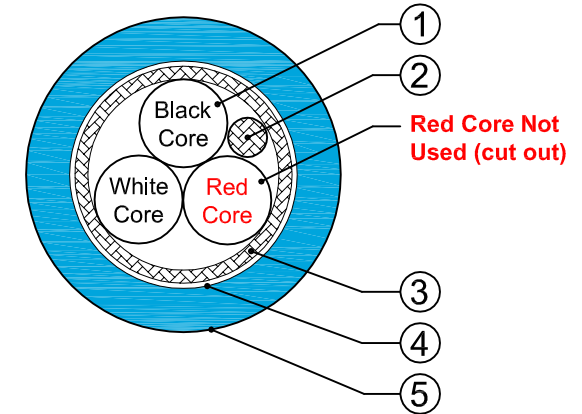

Environment Specification of Cable Assembly
Maximum operating temperature of 150°C with high levels of resistance to chemical attack.

2 Pin MS Connector inside Protective Rubber Boot.

Connector sealed to IP66 only when connected to the accelerometer.

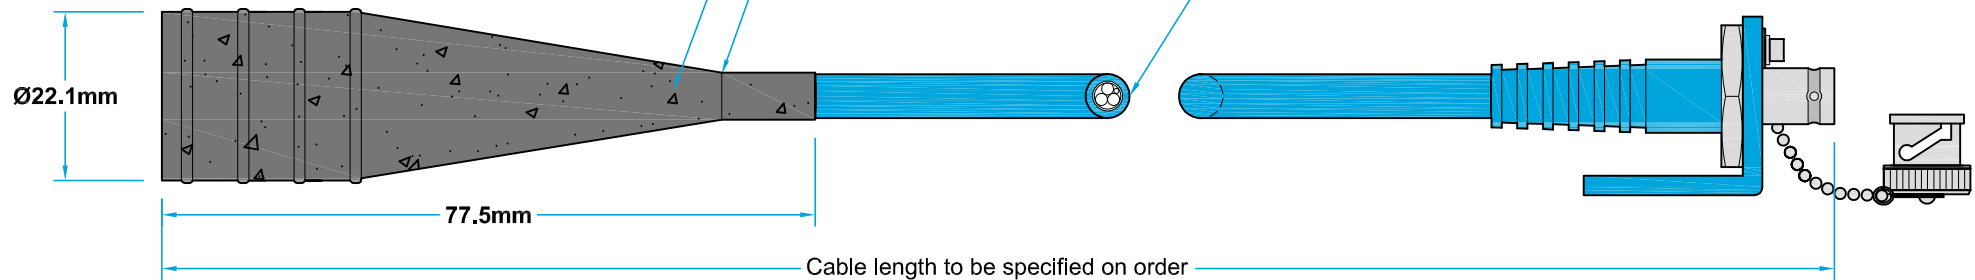

Materials of Cable: C01-018 Silicon Cable

Pos	Description	Dimension	Overall Diameter	Remarks
1.	Tin plated copper conductor insulation of ETFE	20 AWG 0,17	0,96 1,30	19 x 0,20 (0,6sqmm)
2.	Screen wire of tin plated copper	24 AWG	0,60	19 x 0,13 (0,24sqmm)
3.	Braided screen of tin plated copper	16 x 7x 0, 10 Lay = 23,4 Angle = 22,1	3,25	Coverage: 85% min
4.	Non woven polyester binder		3,4	
5.	Jacket of Silicon, blue pressure-extruded round	0,90	5,2 nom	

Technical Data of Cable

Technical Data	Values at 20°C	Unit
Conductor resistance	Max: 32,4	Ω / km
Insulation resistance	>1500	MΩ x km
Test voltage	3	KV DC
Voltage rating	600	V AC
Capacitance	Core-core: 178 ± 18	nF / km
	Core-screen: 335 ± 33	
Impedance	Core-core: 28,6 ± 28	Ω
	Core-screen: 15,3 ± 2	
Weight	46	g / m
Temperature rating	-50 / +150	°C