


Connection Details of Cable Assembly




Inside View of Cable

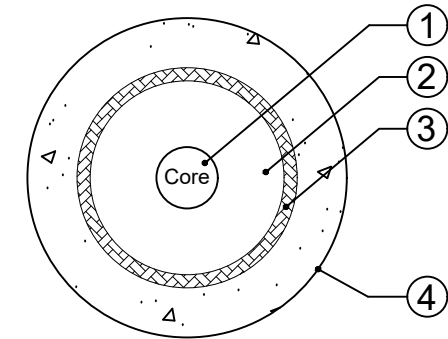

Moulded BNC Plug

Moulded TNC Plug

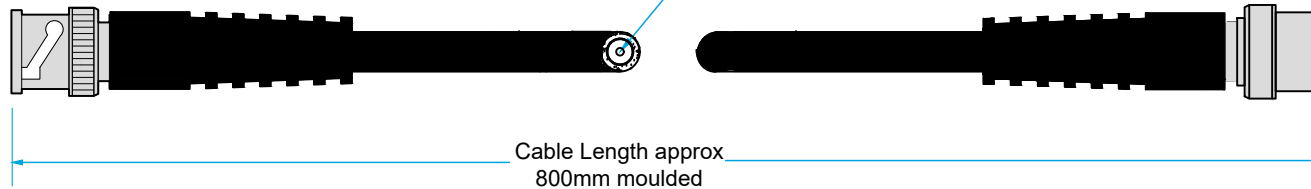

*Please note other lengths available will not have moulded connectors

Materials of Cable: C01-012 RG58/U Black Coax cable

Pos	Description	Dimension	Overall Diameter	Remarks
1.	Core, copper strand tinned.	21/19 AWG	0,9mm (nominal)	
2.	Core insulation, polyethhylene		2,95mm (nominal)	19/0.13
3.	Braiding, copper strand tinned wire	AWG 36	3,5mm (nominal)	Optical cover: 95%
4.	Jacket, polyvinylchloride (PVC)		4,95 (nominal)	

Technical Data of Cable: C01-012 RG58/U Black Coax cable

Technical Data	Values	Unit
Conductor resistance at 20°C	40,7	Ω / km
Propagation time	approx 66%	(5,1 ns/m)
Capacitance	max 105 pF/m at 1 kHz	pF/m
Impedance	50 $\pm$ 2	Ω
Conductor weight	40	Kg / km
Temperature - Operating	-10 to +80	°C
Temperature - Stationary	-40 to +80	°C