


C01-153-2C

2 Core Double Screened & Drain Wire, 200°C

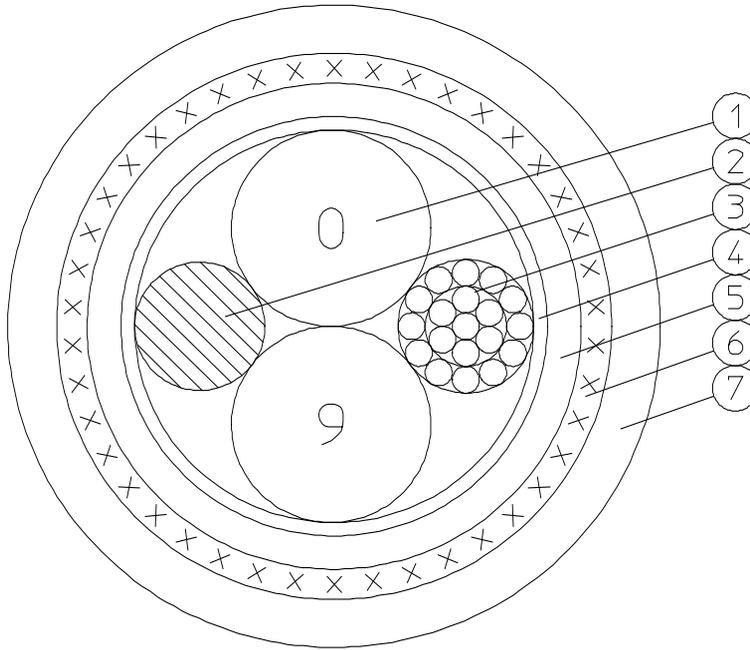

Intended use:
Internal wiring
or external
interconnection of
equipment

Unless stated
otherwise:
Dimensions in mm
Dimensions ±4%
Electrical values ±10%

Colour code	
0	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Violet
8	Grey
9	White
29	Pink
5/4	Green/Yellow



HS-Revision	01
Date	22-07-2019

Description	Dimension	Overall Diameter	Remarks
1 Tin plated copper conductor Fluoropolymer insulation	20 AWG t = 0.255	0.96 1.47	19 x 0.20
2 Glass yarn filler		1.00	
3 Drain wire of tin plated copper	20 AWG	0.96	19 x 0.20
4 Wrapped aluminium / polyester foil screen		3.10	
5 Fluoropolymer jacket, Blue with marking	t = 0.25	3.60	
6 Braided screen of tin plated copper wire	16 x 9 x 0.10	4.10	nominal coverage: 87% lay length: 35.2 angle: 18.9°
7 Fluoropolymer jacket, Blue	t = 0.36	4.82 min: 4.67 max: 4.97	

Electrical Properties		
Technical data	Values at 20°C	Unit
Conductor resistance	32.4	Ohms / km max
Insulation resistance	>1500	M Ohms / km
Test voltage	3	kV DC
Voltage rating	600 / 1000	V AC
Capacitance	Nom: 89	pF / m
Impedance	Nom: 50	Ohms at 1 MHz
AC loop Inductance	0.550	mH / km
L/R ratio	60 Hz: 0.008	ms (2 adjacent cores)

Physical Properties			
Summary	Cores	Jacket	Finished Cable
Flame retardant	IEC 60332-3-24 (Cat C)	IEC 60332-3-24 (Cat C)	IEC 60332-3-24 (Cat C)
Fluids	Acid resistance	Excellent	Excellent
	Base resistance	Excellent	Excellent
	Fuel resistance	Excellent	Excellent
	Oil resistance	Excellent	Excellent
	Water resistance	Excellent	Excellent
Halogen free	No	No	No
Low smoke generation	IEC 61034-2	IEC 61034-2	IEC 61034-2
Radiation tolerance	10 ⁴ Gy	10 ⁴ Gy	10 ⁴ Gy
Weight	N/A	N/A	51 g/m
Temperature *	-80°C	-80°C	-80°C
	Continuous: +180°C 3,000 hrs: +200°C	Continuous: +180°C 3,000 hrs: +200°C	Continuous: +180°C 3,000 hrs: +200°C

Recommended MBR		
Fixed	Flexing	Dynamic
25mm	50mm	100mm

* Cable rated to +200°C. Please note: the tin plating (conductor, drain and screen) will tarnish at temperatures exceeding +180°C, reflected in the long-term temperature rating.

Cable construction does not contain silicone