

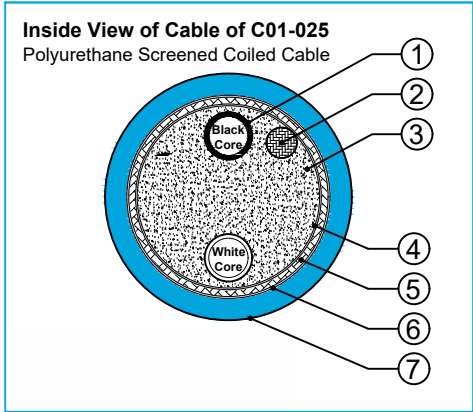


Connection Details of Cable Assembly

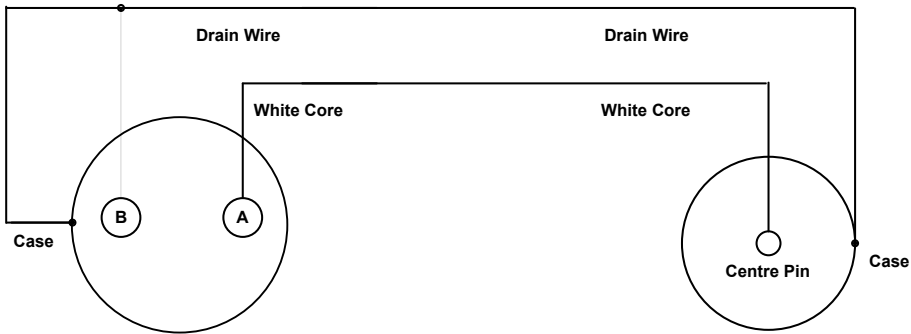

2 Pin MS Connector inside
Protective Rubber Boot.

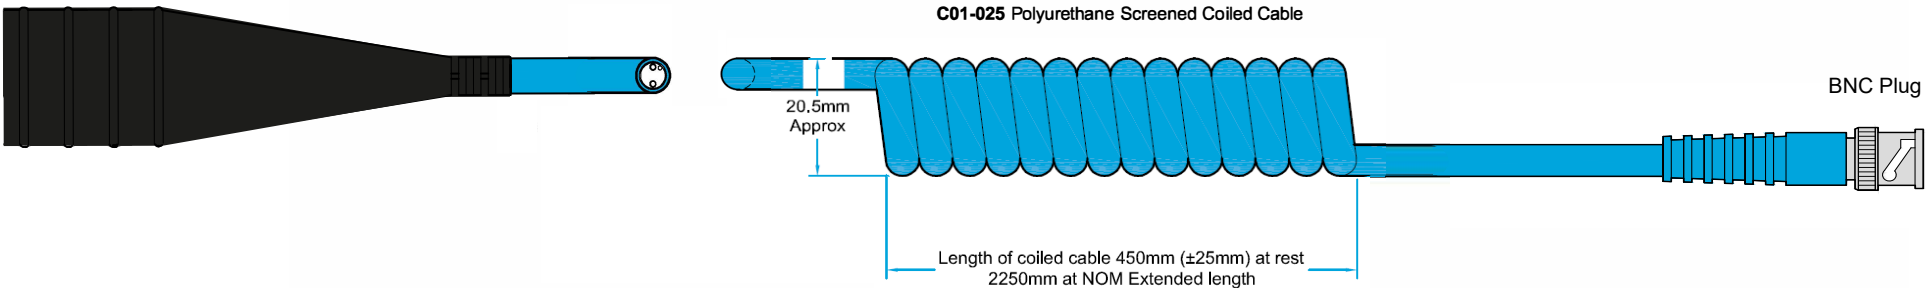

Materials of Cable: C01-025 Polyurethane Screened Coiled Cable			
Pos	Description	Overall Diameter	Remarks
1.	Tin plated copper conductor	1.02	24 AWG
2.	Screen wire of tin plated copper		24 AWG
3.	Poly filler insulation		
4.	Paper wrap insulation seperator		
5.	Braided screen of tin plated copper		
6.	Paper wrap insulation seperator		
7.	Polyurethane jacket	5.4mm (±0.1mm)	Non flame retardant, rated from -40°C to +80°C