


HS-AM Magnets - Pole Piece

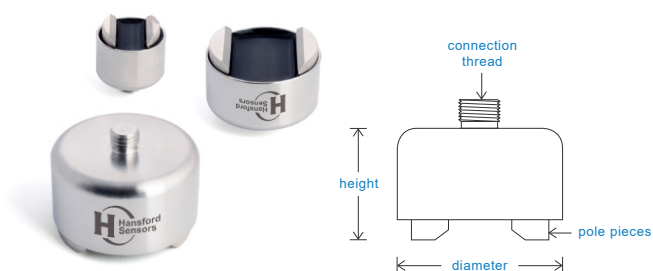

We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Pole Piece Pot Magnets provide a secure, semi-permanent point of connection to a curved surface and all have an operating temperature range up to 120°C

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM020	20mm	1/4"-28 UNF Male	8.5kg	17mm	
HS-AM001	25mm	1/4"-28 UNF Male	18kg	17mm	
HS-AM002	25mm	M6 Male	18kg	17mm	
HS-AM003	25mm	M8 Male	18kg	17mm	
HS-AM004	25mm	10-32 UNF Male	18kg	17mm	
HS-AM026	25mm	1/2" UNC Q-Fit Male	18kg	21mm	
HS-AM005	25mm	Q-Fit Male	18kg	23mm	
HS-AM010	25mm	M5 Female	18kg	23mm	
HS-AM011	25mm	M6 Female	18kg	23mm	
HS-AM012	25mm	1/4"-28 UNF Female	18kg	23mm	
HS-AM013	25mm	M8 Female	18kg	23mm	

HS-AM Magnets - Pole Piece

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM018	32mm	1/4"-28 UNF Male	20kg	20mm	
HS-AM036	32mm	M6 Male	20kg	20mm	
HS-AM037	32mm	M8 Male	20kg	20mm	
HS-AM041	32mm	M6 Female	20kg	26mm	
HS-AM040	32mm	M8 Female	20kg	26mm	
HS-AM035	32mm	1/4"-28 UNF Female	20kg	26mm	
HS-AM039	35mm	1/4"-28 UNF Male	35kg	33mm	
HS-AM042	35mm	M5 Female	35kg	33mm	
HS-AM043	35mm	M6 Female	35kg	33mm	
HS-AM038	35mm	1/4"-28 UNF Female	35kg	33mm	
HS-AM044	35mm	M8 Female	35kg	33mm	
HS-AM058	36mm	1/4"-28 UNF Female	23kg	19mm	