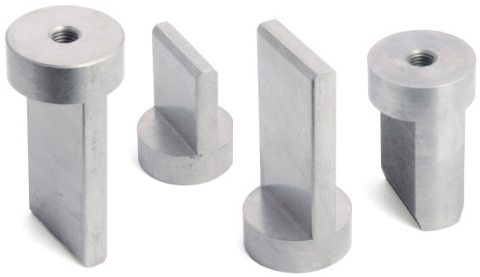
HS-AS Studs
fin mounts



For use in the fins of an electric motor.

Mounting Studs provide a secure, permanent or semi-permanent point of connection





Part No.	Connection Point 1	Connection Point 2	
HS-AS040-40	¼”-28 UNF Female	40 mm x 7 mm	
HS-AS040-40-M8	M8 x 1.25 Female	40 mm x 7 mm	
HS-AS040-50	¼”-28 UNF Female	50 mm x 7 mm	
HS-AS105-1	¼”-28 UNF Female	30 mm x 13 mm	
HS-AS105-1-M6	M6 Female	30 mm x 13 mm	
HS-AS105-1-M8	M8 Female	30 mm x 13 mm	

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

HS-AS Studs
fin mounts



Part No.	Connection Point 1	Connection Point 2	
HS-AS105-2	¼”-28 UNF Female	50 mm x 13 mm	
HS-AS105-2-M6	M6 Female	50 mm x 13 mm	
HS-AS105-2-M8	M8 Female	50 mm x 13 mm	
HS-AS105-3	¼”-28 UNF Female	45 mm x 5 mm	
HS-AS105-3-M8	M8 x 1.25 Female	45 mm x 5 mm	
HS-AS105-4	¼”-28 UNF Female	25 mm x 5 mm	
HS-AS105-4-M6	M6 Female	25 mm x 5 mm	
HS-AS105-4-M8	M8 Female	25 mm x 5 mm	

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

HS-AS Studs
fin mounts

Part No.	Connection Point 1	Connection Point 2	
HS-AS178-1	M5 Female	30mm x 13mm	
HS-AS178-2	M5 Female	50mm x 13mm	
HS-AS178-3	M5 Female	45mm x 6.35mm	
HS-AS178-4	M5 Female	25mm x 6.35mm	

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice