# HS-AS Studs
## glue face



Glue face studs are designed to provide a stronger glue surface to connect an accelerometer via.

Mounting Studs provide a secure, permanent or semi-permanent point of connection

| Part No. | Connection Point 1 | Material | Connection Point 2 | |
|---|---|---|---|---|
| HS-AS014 | ¼"-28 UNF Male | | Glue Face x Ø19mm | |
| HS-AS014-38 | ¼"-28 UNF Male | | Glue Face x Ø38mm | |
| HS-AS014-44 | ¼"-28 UNF Male | | Glue Face x Ø44mm | |
| HS-AS014-M6 | M6 Male | | Glue Face x Ø19mm | |
| HS-AS014-M6-30 | M6 Male | | Glue Face x Ø30mm | |
| HS-AS019-15 | Magnet | 416 Stainless Steel | Glue Face x Ø15mm | |
| HS-AS019-18 | Magnet | 416 Stainless Steel | Glue Face x Ø18mm | |
| HS-AS019-24 | Magnet | 416 Stainless Steel | Glue Face x Ø24mm | For Quantity this product can be etched. |
| HS-AS019-30 | Magnet | 416 Stainless Steel | Glue Face x Ø30mm | For Quantity this product can be etched. |
| HS-AS019-38 | Magnet | 416 Stainless Steel | Glue Face x Ø38mm | For Quantity this pro-ductcan be etched. |
| HS-AS027-M6 | M6 Female | 416 Stainless Steel | Glue Face x 20mm AF | |
| HS-AS027-M8 | M8 Female | 416 Stainless Steel | Glue Face x 20mm AF | |
| HS-AS027-M8x1 | M8 x 1 Female | 416 Stainless Steel | Glue Face x 20mm AF | |
| HS-AS027-M8-SS | M8 x Female | 316L Stainless Steel | Glue Face x 20mm AF | |



Hansford Sensors
*Excellence in Vibration Monitoring*

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

# HS-AS Studs
## glue face



Glue face studs are designed to provide a stronger glue surface to connect an accelerometer via.

Mounting Studs provide a secure, permanent or semi-permanent point of connection

| Part No. | Connection Point 1 | Material | Connection Point 2 | |
|---|---|---|---|---|
| HS-AS027-1/4 | 1/4"-28UNF Hex Female | 416 Stainless Steel | Glue Face x Ø20mm | |
| HS-AS029 | 10-32 UNF Male | | Glue Face x Ø19mm | |
| HS-AS036 | M8 Male | | Glue Face x 20.6mm AF | |
| HS-AS036-M6 | M6 Male | | Glue Face x 20.6mm AF | |
| HS-AS055 | M6 Male | | Glue Face x Ø50mm | |
| HS-AS059-1/4 | ¼"-28 UNF Female | 416 Stainless Steel | Glue Face x Ø19mm | |
| HS-AS059-1/4-25 | ¼"-28 UNF Female | 416 Stainless Steel | Glue Face x Ø25mm | |
| HS-AS059-1/4-30 | ¼"-28 UNF Female | 416 Stainless Steel | Glue Face x Ø30mm | |
| HS-AS059-M6 | M6 Female | 416 Stainless Steel | Glue Face x Ø19mm | |
| HS-AS059-M6-25 | M6 x 1 Female | 416 Stainless Steel | Glue Face x Ø25m | |
| HS-AS059-M6-30 | M6 x 1 Female | 416 Stainless Steel | Glue Face x Ø30m | |



Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

# HS-AS Studs
## glue face



Glue face studs are designed to provide a stronger glue surface to connect an accelerometer via.

Mounting Studs provide a secure, permanent or semi-permanent point of connection

| Part No. | Connection Point 1 | Material | Connection Point 2 | |
|---|---|---|---|---|
| HS-AS059-M8 | M8 x 1.25 Female | 416 Stainless Steel | Glue Face x Ø19m | |
| HS-AS059-M8-25 | M8 x 1.25 Female | 416 Stainless Steel | Glue Face x Ø25m | |
| HS-AS059-M8-30 | M8 x 1.25 Female | 416 Stainless Steel | Glue Face x Ø30m | |
| HS-AS062 | M8 x 1 Male | | Glue Face x Ø50m | |
| HS-AS087 | Magnet - Ømm Centre Hole | 416 Stainless Steel | Glue Face x Ø19mm | |
| HS-AS166 | 1/4"-28UNF Male | | Glue Face x Ø22,5mm | |
| HS-AS174-1/4 | 1/4"-28UNF Female | | Glue Face x 20.6mm AF | |
| HS-AS174-M8 | M8 Female | | Glue Face x 20.6mm AF | |
| HS-AS206-1/4 | 1/4"-28UNF Female | | Glue Face x 20.6mm AF | |
| HS-AS222 | Glue Face | | Glue Face x Ø38mm | |



Hansford Sensors
*Excellence in Vibration Monitoring*

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice


# HS-AS Studs
## glue face



Glue face studs are designed to provide a stronger glue surface to connect an accelerometer via.

Mounting Studs provide a secure, permanent or semi-permanent point of connection

| Part No. | Connection Point 1 | Material | Connection Point 2 | |
|---|---|---|---|---|
| HS-AS226-1/4 | 1/4"-28UNF Male | | Glue Face x Ø35m | For use with HS-173 Triaxial |
| HS-AS226-M6 | M6 Female | | Glue Face x Ø35m | For use with HS-173 Triaxial |
| HS-AS226-M8 | M8 Female | | Glue Face x Ø35m | For use with HS-173 Triaxial |
| HS-AS242 | 5-40 UNC Female | | 13mm AF Hex Glue Stud | |
| HS-AS243 | 1/4"-28UNF Male | | 20mm AF Hex Glue Stud | |

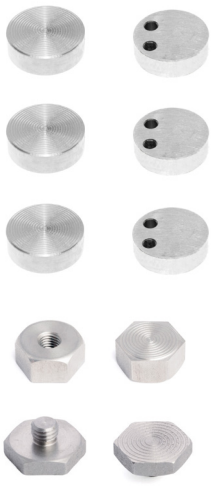

Hansford Sensors
*Excellence in Vibration Monitoring*

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice