


HS-BE BNC Enclosure

Polycarbonate

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

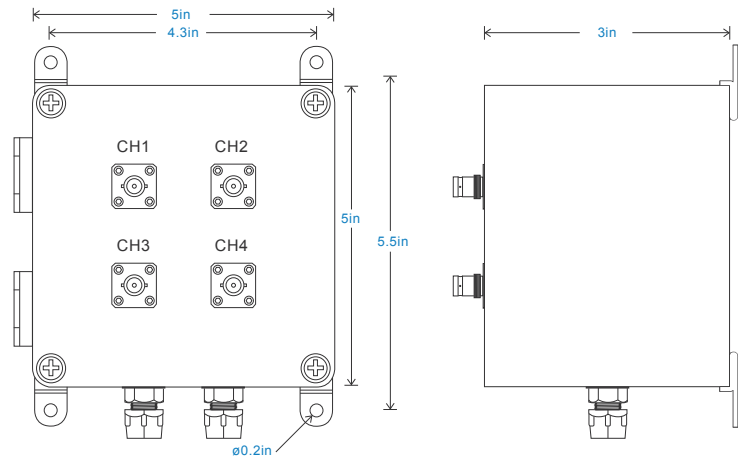

Technical Performance

| | | | |
|-------------|---|-----------|---|
| Inputs | Via accelerometer | Glanding | Glands supplied and fitted |
| Output | BNC as standard (alternatives can be specified in 'How To Order' table) | | Holes are punched for: |
| Material | Polycarbonate | Labelling | Single input M12 - $\varnothing 0.1-0.3$ in cable |
| Dimensions | see: diagram | Mounting | Screen printed channel identification |
| Sealing | NEMA 12 | EMC | supplied are 4 x Brackets |
| Termination | PCB Mounted Screw Terminal | | EN61326-1:2013 |
| Door | Hinged | | |

How To Order

