


HS-CE Connection Enclosure

Painted Mild Steel

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

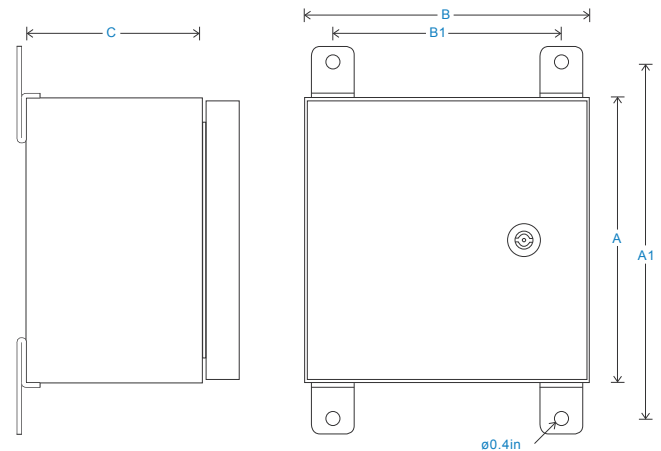

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Termination	Klippon Type
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Door	Twist Handle
Mounting Board	Engraved traffolyte panel (customisable upon request)	Glanding	Glands supplied but not fitted Holes are punched for: Single input M12 - $\varnothing 0.1-0.3$ in cable Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable Multi input M20 - 3 x $\varnothing 0.2$ in
Material	Mild Steel painted RAL 7042 as standard (alternatives can be specified in options of 'How To Order' table)	Labelling	Channel locations - other labelling available upon request
Dimensions	see: 'How To Order' table	Mounting	supplied are 4 x Brackets
Sealing	NEMA 4X	EMC	EN61326-1:2013

How To Order

