


HS-CE-SR Connection Enclosure

Stainless Steel with protective roof

Key Features

- Protective roof to stop dust and dirt settling
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

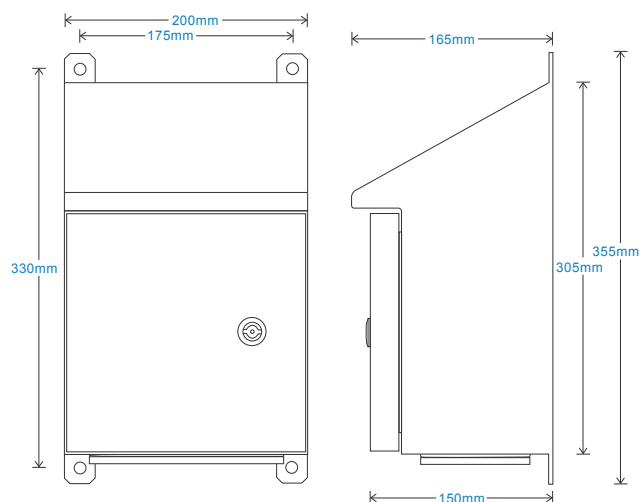

Technical Performance

| | | | |
|----------------|--------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Inputs | Via accelerometer | Door | Lock and polyamide key |
| Output | BNC as standard (alternatives can be specified in 'How To Order' table) | Glanding | Glands supplied but not fitted |
| Mounting Board | Engraved traffolyte panel (customisable upon request) | | Holes are punched for: Single input M12 - $\varnothing 3.5$ -7mm cable Single input M20 - $\varnothing 7$ -13mm multi-core cable Multi input M20 - 3 x $\varnothing 5.3$ mm |
| Material | 304 Stainless Steel (to be specified in options of 'How To Order' table) | Labelling | Channel locations - other labelling available upon request |
| Dimensions | see: diagram | Mounting | supplied are 4 x Brackets |
| Sealing | IP65 | EMC | EN61326-1:2013 |
| Termination | Klippon Type | | |

How To Order

