


HS-CE-SSM Connection Enclosure

Stainless Steel

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

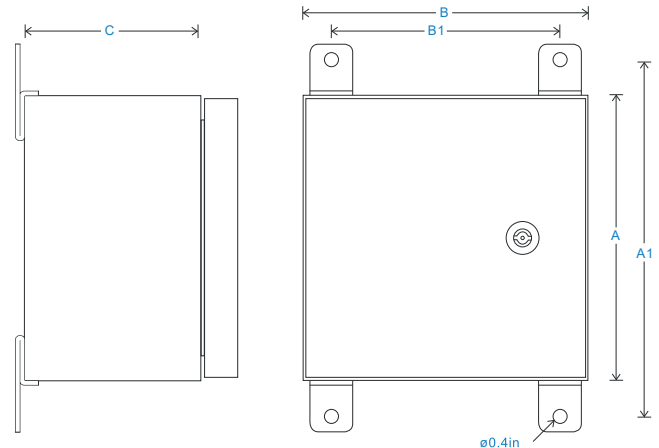

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard (TNC as alternative)	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
Material	304 Stainless Steel		Single input M12 - ø0.1-0.3in cable
Dimensions	see: 'How To Order' table		Single input M20 - ø0.3-0.7in multi-core cable
Sealing	NEMA 4X		Multi input M20 - 3 x ø0.2in
Termination	Spring-loaded terminal (no screwdriver required)	Labelling	Channel locations - other labelling available upon request
		Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

