


HS-CEI Connection Enclosure

Stainless Steel - with safety barriers

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

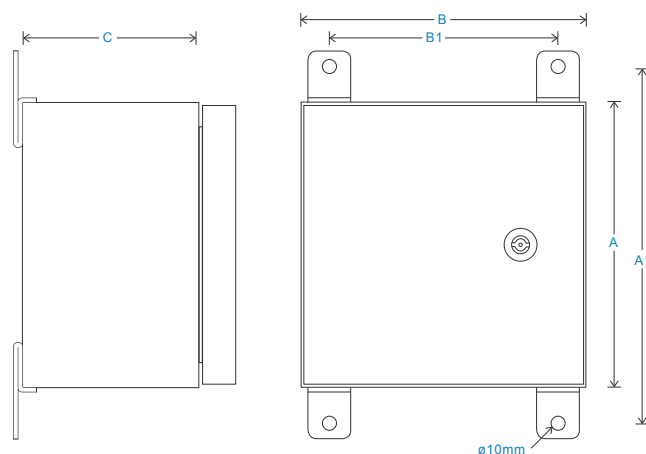

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	BNC as standard (alternatives can be specified in 'How To Order' table)		Holes are punched for: Single input M12 - ø3.5-7mm cable Multi input M20 - 3 x ø5.3mm
Mounting Board	Engraved traffolyte panel (customisable upon request)		Channel locations - other labelling available upon request
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Labelling	supplied are 4 x Brackets
Dimensions	see: 'How To Order' table	Mounting	MTL 7728 Zener Barrier (BAS01ATEX7217) M06-027-B
Sealing	IP66	Safety Barrier	EN61326-1:2013
Termination	Klippon Type	EMC	
Door	Lock and polyamide key		

How To Order

