


HS-CEI Connection Enclosure

Stainless Steel - with safety barriers

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

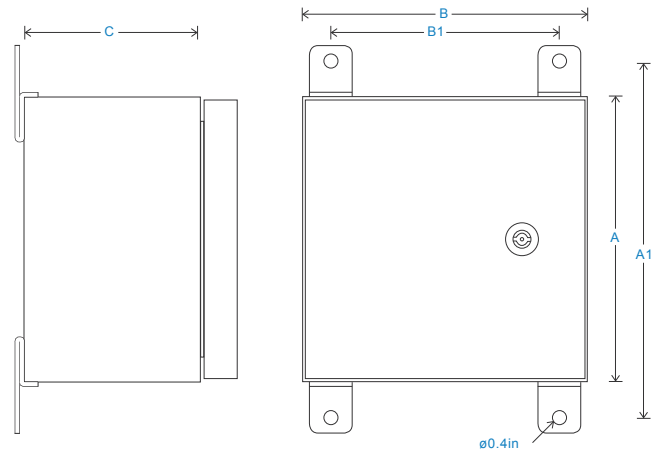


dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	BNC as standard (alternatives can be specified in 'How To Order' table)		Holes are punched for:
Mounting Board	Engraved traffolyte panel (customisable upon request)		Single input M12 - $\varnothing 0.1-0.3$ in cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Dimensions	see: 'How To Order' table		Multi input M20 - 3 x $\varnothing 0.2$ in
Sealing	NEMA 4X		Channel locations - other
Termination	Klippon Type		labelling available upon request
Door	Lock and polyamide key		supplied are 4 x Brackets
			MTL 7728 Zener Barrier
			(BAS01ATEX7217) M06-027-B
			EN61326-1:2013

How To Order

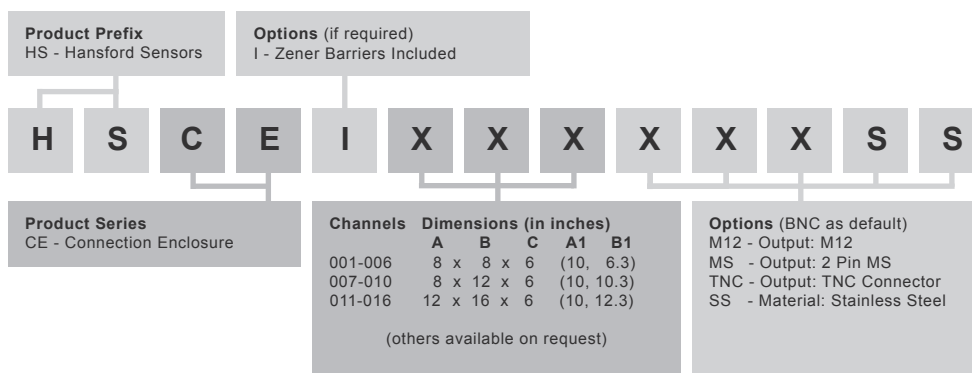

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS254U.4

