
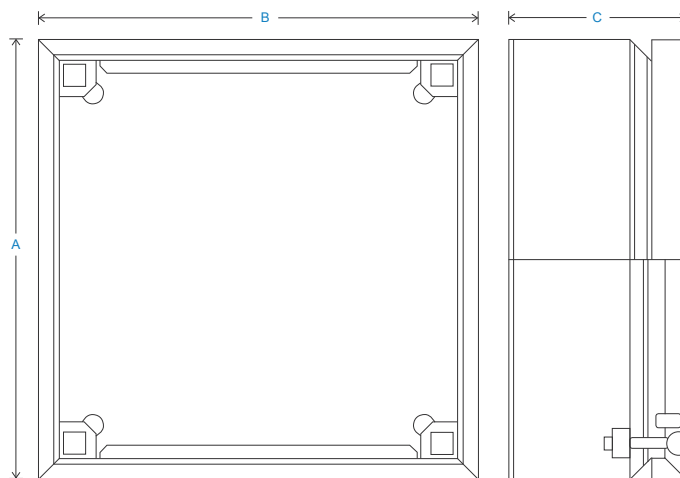


HS-JE Junction Enclosure

Mild Steel

Key Features

- Accelerometer cable glanding
- Ease of installation
- Flexible combinations

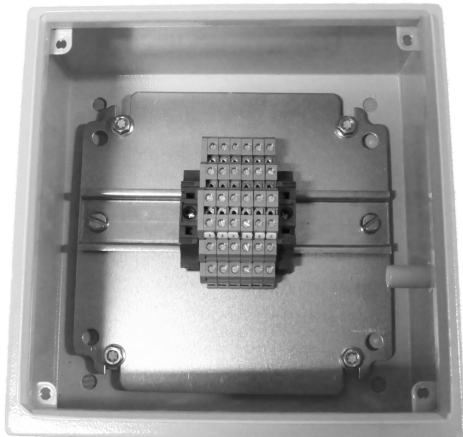

Technical Performance

Inputs	Accelerometer cabling	Glanding	Glands supplied but not fitted
Output	Multi-core glanding		Holes are punched for:
Material	Mild Steel painted RAL 7042 as standard (alternatives can be specified in options of 'How To Order' table)	Single input M12 - ø3.5-7mm cable	Single input M20 - ø7-13mm multi-core cable
Dimensions	see: 'How To Order' table	Labelling	Multi input M20 - 3 x ø5.3mm
Sealing	IP66	Mounting	Channel locations - other labelling available upon request
Termination	Klippon Type	EMC	supplied are 4 x Brackets
Operating Temperature Range	-20 to 110°C		EN61326-1:2013

How To Order

