
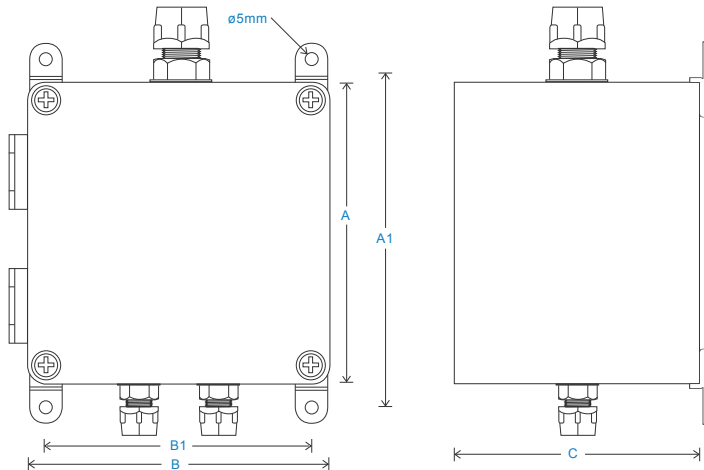


HS-JE Junction Enclosure

Polycarbonate

Key Features

- Accelerometer cable glanding
- Ease of installation
- Flexible combinations

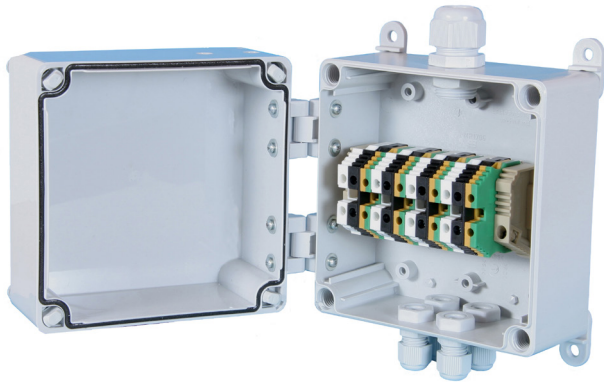

Technical Performance

Inputs	Accelerometer cabling	Glanding	Glands supplied but not fitted
Output	Multi-core glanding		Holes are punched for:
Material	Polycarbonate (to be specified in options of 'How To Order' table)	Single input M12 - $\varnothing 3.5$ -7mm cable	
Dimensions	see: 'How To Order' table	Single input M20 - $\varnothing 7$ -13mm multi-core cable	
Sealing	IP66	Multi input M20 - 3 x $\varnothing 5.3$ mm	
Termination	Klippon Type	Labelling	Channel locations - other labelling available upon request
Operating Temperature Range	-20 to 130°C	Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

