


HS-SE-DT-SRM Switching Enclosure

Stainless Steel with protective roof - vibration and temperature output

Key Features

- Protective roof to stop dust and dirt settling
- Dual output for vibration and temperature
- BNC and 3 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector

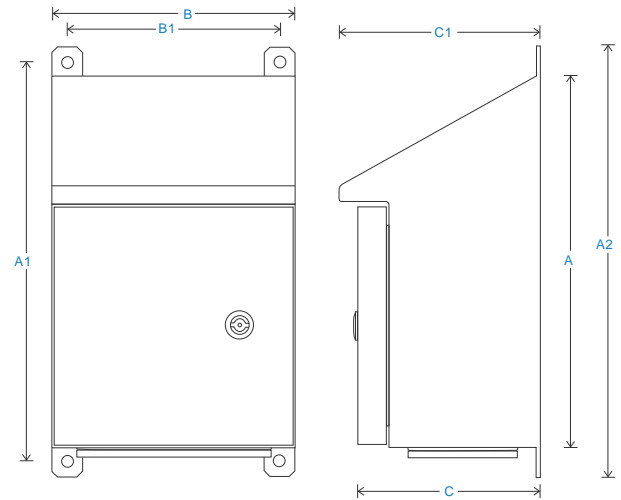

Technical Performance

Inputs	Via dual output vibration and temperature accelerometer	Door	Lock and polyamide key
Output	BNC and 3 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel (customisable upon request)		Holes are punched for: Single input M12 - $\varnothing 3.5$ -7mm cable Single input M20 - $\varnothing 7$ -13mm multi-core cable Multi input M20 - 3 x $\varnothing 5.3$ mm
Material	304 Stainless Steel	Labelling	Channel locations - other labelling available upon request
Dimensions	see: diagram	Mounting	supplied are 4 x Brackets
Termination	Spring-loaded terminal (no screwdriver required)	EMC	EN61326-1:2013
Sealing	IP66		

How To Order

