


# HS-SE-DT-SRM Switching Enclosure

Stainless Steel with protective roof - vibration and temperature output

## Key Features


- Protective roof to stop dust and dirt settling
- Dual output for vibration and temperature
- BNC and 3 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector

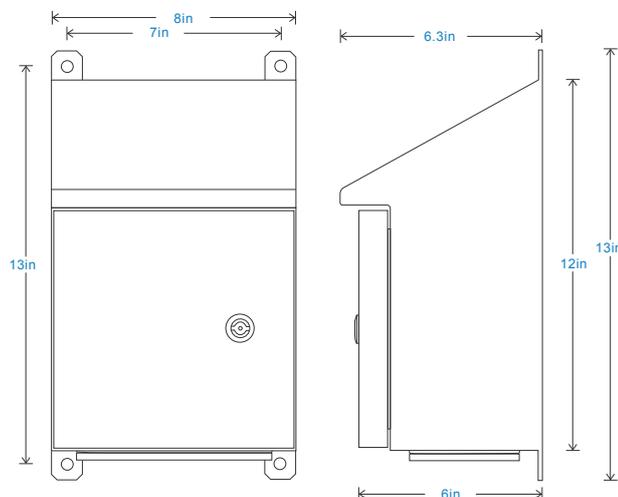

## Technical Performance

Inputs	Via dual output vibration and temperature accelerometer	Door	Lock and polyamide key
Output	BNC and 3 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel (customisable upon request)		Holes are punched for: Single input M12 - $\varnothing$ 0.1-0.3in cable Single input M20 - $\varnothing$ 0.3-0.7in multi-core cable
Material	304 Stainless Steel		Multi input M20 - 3 x $\varnothing$ 0.2in
Dimensions	see: diagram	Labelling	Channel locations - other labelling available upon request
Termination	Spring-loaded terminal (no screwdriver required)	Mounting	supplied are 4 x Brackets
Sealing	NEMA 4X	EMC	EN61326-1:2013

## How To Order

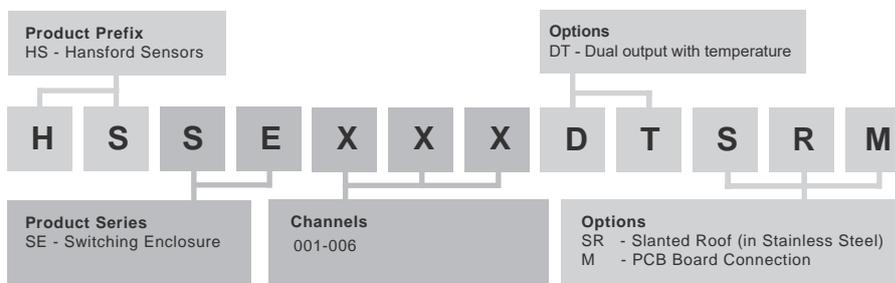

[www.hansfordsensors.com](http://www.hansfordsensors.com)  
[sales@hansfordsensors.com](mailto:sales@hansfordsensors.com)

We reserve the right to alter the specification of this product without prior notice  
 TS1126U.2

