


HS-SE-M Switching Enclosure

Mild Steel

Key Features

- BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

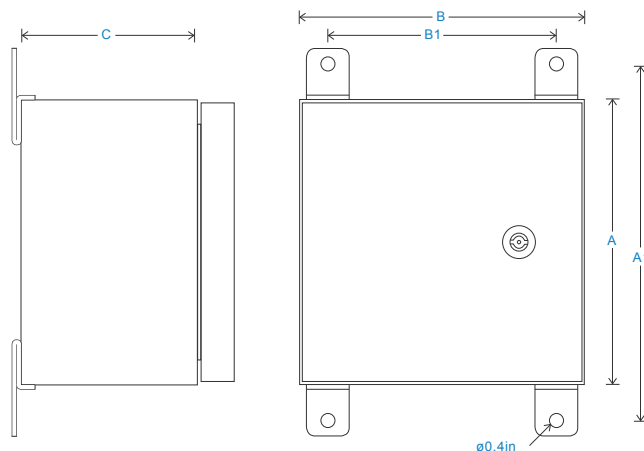

Technical Performance

Inputs	Via accelerometer	Door	Twist Handle
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customizable upon request)		Single input M12 - ø0.1-0.3in cable
Material	Mild Steel painted RAL 7042 as standard (alternatives can be specified in options of 'How To Order' table)		Single input M20 - ø0.3-0.7in multi-core cable
Dimensions	see: diagram	Labelling	Channel locations - other labelling available upon request
Termination	Spring-loaded terminal (no screwdriver required)	Mounting	supplied are 4 x Brackets
Sealing	NEMA 4X	EMC	EN61326-1:2013

How To Order

