


HS-SE-SR-SC Switching Enclosure

Stainless Steel with protective roof and self-closing hinges

Key Features

- Self-closing hinges
- Protective roof to stop dust and dirt settling
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector

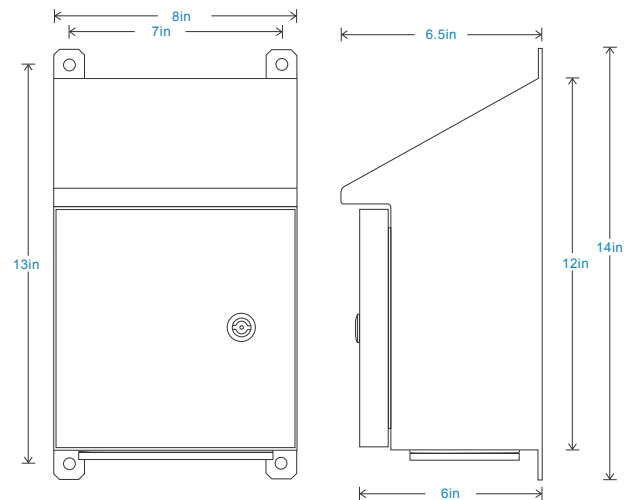

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)	Holes are punched for: Single input M12 - $\varnothing 0.1-0.3$ in cable Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable Multi input M20 - 3 x $\varnothing 0.2$ in	
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Labelling	Channel locations - other labelling available upon request
Dimensions	see: diagram	Mounting	supplied are 4 x Brackets
Sealing	NEMA 4X	EMC	EN61326-1:2013
Termination	Klippon Type		

How To Order

