


HS-SE-SRMMO Switching Enclosure

Stainless Steel with outputs for online expansion and protective roof

Key Features

- Protective roof to stop dust and dirt settling
- Continuous BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Terminals for online expansion
- Multiple outputs via one connector

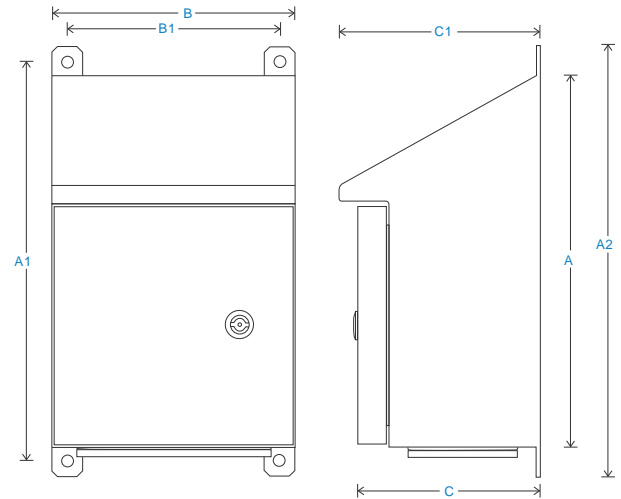

Technical Performance

| | | | |
|----------------|------------------------------|-----------|---|
| Inputs | Via accelerometer | Glanding | Glands supplied but not fitted |
| Output | BNC and 2 Pin MS as standard | | Holes are punched for: |
| Mounting Board | PCB Panel | | Single input M12 - ø3.5-7mm cable |
| | (customisable upon request) | | Single input M20 - ø7-13mm multi-core cable |
| Material | 304 Stainless Steel | | Multi input M20 - 3 x ø5.3mm |
| Dimensions | see: 'How To Order' table | Labelling | Channel locations - other |
| Termination | Quick-release terminal | | labelling available upon request |
| Sealing | IP66 | Mounting | supplied are 4 x Brackets |
| Door | Lock and polyamide key | EMC | EN61326-1:2013 |

How To Order

