


HS-SE-SRMMO Switching Enclosure

Stainless Steel with outputs for online expansion and protective roof

Key Features

- Protective roof to stop dust and dirt settling
- Continuous BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Terminals for online expansion
- Multiple outputs via one connector

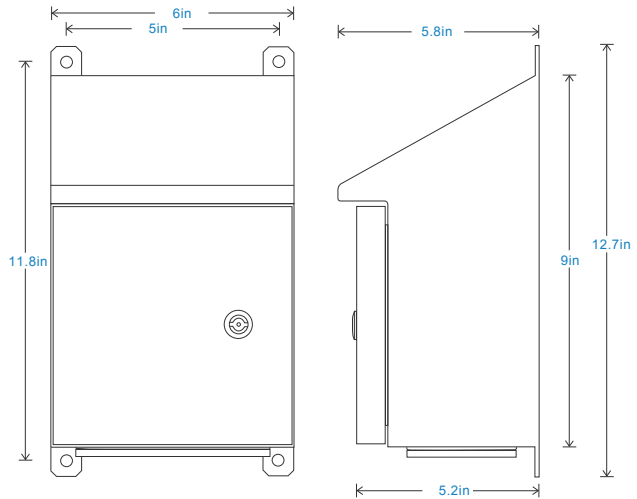

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	BNC and 2 Pin MS as standard		Holes are punched for:
Mounting Board	PCB Panel		Single input M12 - $\varnothing 0.1-0.3$ in cable
	(customizable upon request)		Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Material	304 Stainless Steel		Multi input M20 - 3 x $\varnothing 0.2$ in
Dimensions	see: diagram	Labelling	Channel locations - other
Termination	Quick-release terminal		labelling available upon request
Sealing	NEMA 4X	Mounting	supplied are 4 x Brackets
Door	Lock and polyamide key	EMC	EN61326-1:2013

How To Order

