


HS-SE-TX-PC Switching Enclosure

Polycarbonate Enclosure for use with Triaxial

Key Features

- Provides a terminal to take readings from Triaxial accelerometers via a portable data-collector
- Multiple outputs via M12 connector

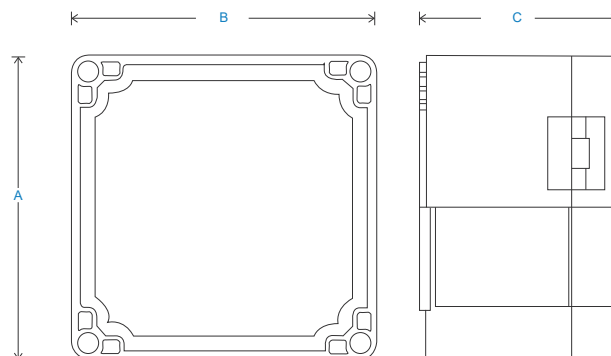

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	M12		Holes are punched for:
Mounting Board	Engraved traffolyte panel (customisable upon request)		Single input M12 - $\varnothing 3.5$ -7mm cable
			Single input M20 - $\varnothing 7$ -13mm multi-core cable
Material	Polycarbonate		Multi input M20 - 3 x $\varnothing 5.3$ mm
Dimensions	see: 'How To Order' table	Labelling	Channel locations - other labelling available upon request
Sealing	IP66	Mounting	supplied are 4 x Brackets
Termination	Din rail terminals wired to switch	EMC	EN61326-1:2013
Door	Catches		

How To Order

