


HS-SE-TX-PC Switching Enclosure

Polycarbonate Enclosure for use with Triaxial

Key Features

- Provides a terminal to take readings from Triaxial accelerometers via a portable data-collector
- Multiple outputs via M12 connector

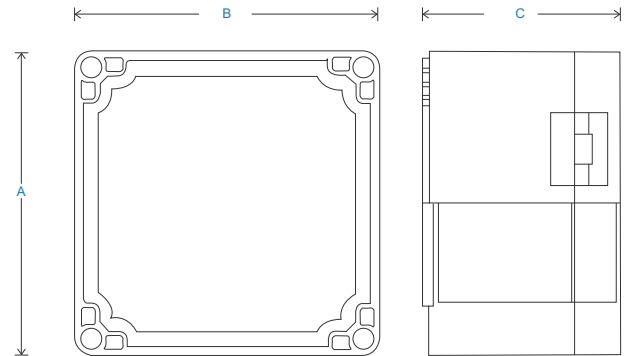

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	M12		Holes are punched for:
Mounting Board	Engraved traffolyte panel (customisable upon request)		Single input M12 - $\varnothing 0.1-0.3$ in cable
			Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Material	Polycarbonate		Multi input M20 - 3 x $\varnothing 0.2$ in
Dimensions	see: 'How To Order' table	Labelling	Channel locations - other
Sealing	NEMA 4X		labelling available upon request
Termination	Din rail terminals wired to switch	Mounting	supplied are 4 x Brackets
Door	Catches	EMC	EN61326-1:2013

How To Order

