



Connection Details of Cable Assembly

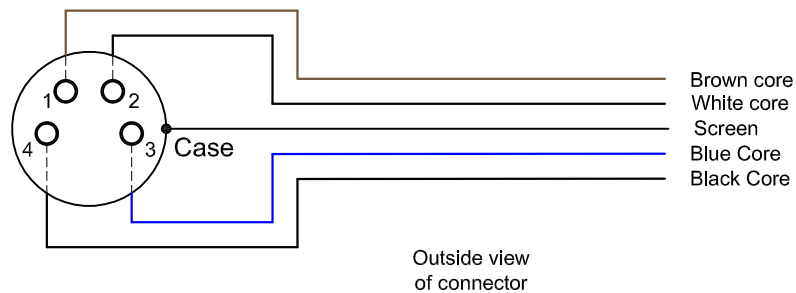


Inside View of Cable

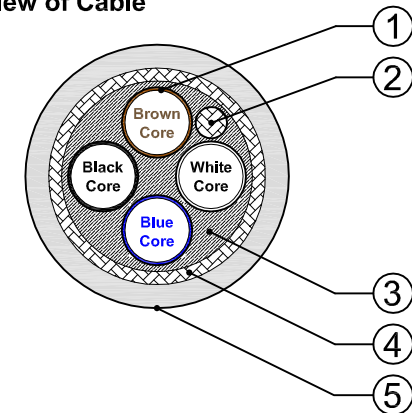


HS-AC051
M8 4 Pole
Straight Connector



HS-AC052
M8 4 Pole
Right Angle Connector



Connector sealed to IP66 only when connected to the accelerometer.



Materials of Cable	
Pos	Description
1.	Conductor, bare soft copper wire
2.	Screen wire, tinned copper
3.	Stranding, 4 cores surrounding a woollen inner core
4.	Screen, tinned copper
5.	Outer sheath

Technical Data of Cable		
Technical Data	Values at 20°C	Unit
Insulation Resistance	>10 ⁹ Ω	Ω
Operating Voltage	max.30V	V
Operating Temperature Range	-30°C to + 90°C	°C