


# HS-SE-TX-SR Switching Enclosure

Stainless Steel Enclosure with protective roof for use with Triaxial

## Key Features

- Protective roof to stop dust and dirt settling
- Provides a terminal to take readings from Triaxial accelerometers via a portable data-collector
- Multiple outputs via one connector

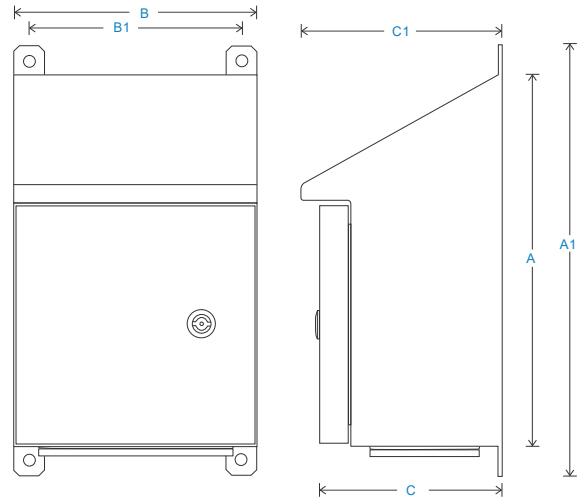

dimensions to be specified in 'how to order' table

## Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Holes are punched for: Single input M12 - $\varnothing 3.5$ -7mm cable Single input M20 - $\varnothing 7$ -13mm multi-core cable Multi input M20 - 3 x $\varnothing 5.3$ mm
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Labelling	Channel locations - other labelling available upon request
Dimensions	see: diagram	Mounting	supplied are 4 x Brackets
Sealing	IP66	EMC	EN61326-1:2013
Termination	Din rail terminals wired to switch		

## How To Order

Product Prefix		Options (if required)														
HS - Hansford Sensors		C - Compact design														
H	S	S	E	X	X	X	X	X	X	X	T	X	S	R		
Product Series				Triaxials			Dimensions (in mm)			Options (BNC as default)			Transducer Type		Material	
SE - Switching Enclosure				001-006 007-012			A B C A1 B1 C1 305 x 200 x 150 (355, 175, 165) 305 x 300 x 150 (355, 275, 165)			M12 - Output: M12 MS - Output: 2 Pin MS TNC - Output: TNC Connector			TX - Triaxial		SR - Slanted Roof (in Stainless Steel)	