


HS-SE-TX-SS Switching Enclosure

Stainless Steel Enclosure for use with Triaxial

Key Features

- Provides a terminal to take readings from Triaxial accelerometers via a portable data-collector
- Multiple outputs via one connector

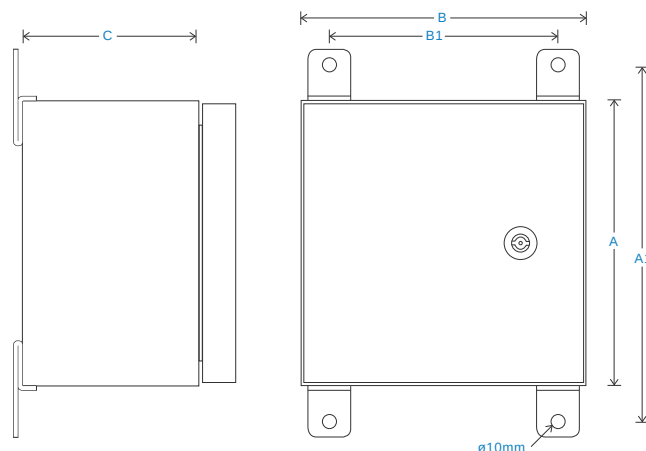

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)	Single input M12 - ø3.5-7mm cable	Holes are punched for:
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Single input M20 - ø7-13mm multi-core cable	Multi input M20 - 3 x ø5.3mm
Dimensions	see: 'How To Order' table	Labelling	Channel locations - other labelling available upon request
Sealing	IP66	Mounting	supplied are 4 x Brackets
Termination	Din rail terminals wired to switch	EMC	EN61326-1:2013

How To Order

