


HS-SE-SRM Switching Enclosure

Stainless Steel with protective roof

Key Features

- Protective roof to stop dust and dirt settling
- BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

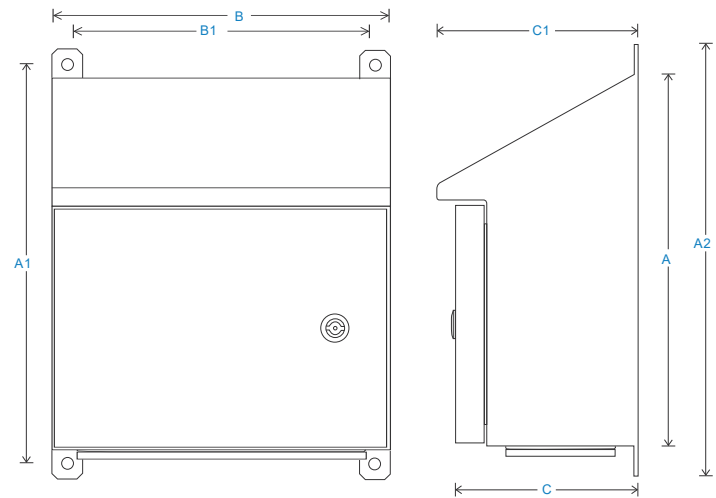

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - ø3.5-7mm cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M20 - ø7-13mm multi-core cable
			Multi input M20 - 3 x ø5.3mm
Dimensions	see: diagram	Labelling	Channel locations - other
Termination	Spring-loaded terminal (no screwdriver required)		labelling available upon request
Sealing	IP66	Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

Product Prefix HS - Hansford Sensors										
H	S	S	E	X	X	X	S	R	M	
Product Series SE - Switching Enclosure			Channels		Dimensions (in mm)				Options (flat roof as default) SR - Slanted Roof (in Stainless Steel) M - PCB Board Connection	
					A	B	C	A1		B1
			001-012	307 x 200 x 150				(330, 175, 175)		357
			013-024	314 x 300 x 168				(360, 275, 170)		363
(others available on request)										