


HS-SEC-SSM Switching Enclosure

Stainless Steel

Key Features

- BNC output
- Compact design
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector

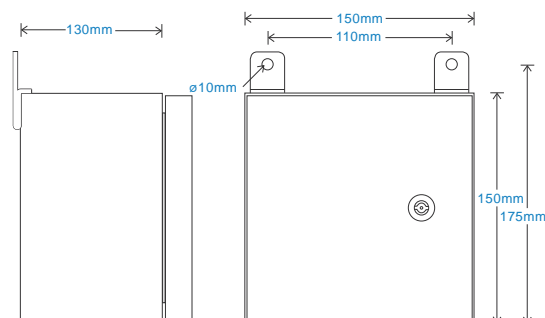

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - \varnothing 3.5-7mm cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M20 - \varnothing 7-13mm multi-core cable
			Multi input M20 - 3 x \varnothing 5.3mm
Dimensions	see: diagram	Labelling	Channel locations - other
Termination	Spring-loaded terminal (no screwdriver required)		labelling available upon request
Sealing	IP66	Mounting	supplied are 2 x Brackets
		EMC	EN61326-1:2013

How To Order

