


# HS-SEC-SSM Switching Enclosure

Stainless Steel

## Key Features

- BNC output
- Compact design
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector

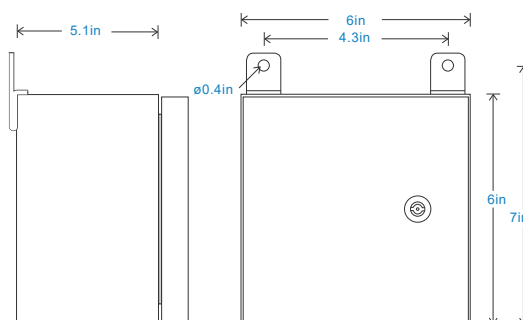

## Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - $\varnothing 0.1-0.3$ in cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Dimensions	see: diagram		Multi input M20 - 3 x $\varnothing 0.2$ in
Termination	Spring-loaded terminal (no screwdriver required)	Labelling	Channel locations - other labelling available upon request
Sealing	NEMA 4X	Mounting	supplied are 2 x Brackets
		EMC	EN61326-1:2013

## How To Order

