


# HS-CE-M Connection Enclosure

Painted Mild Steel

## Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

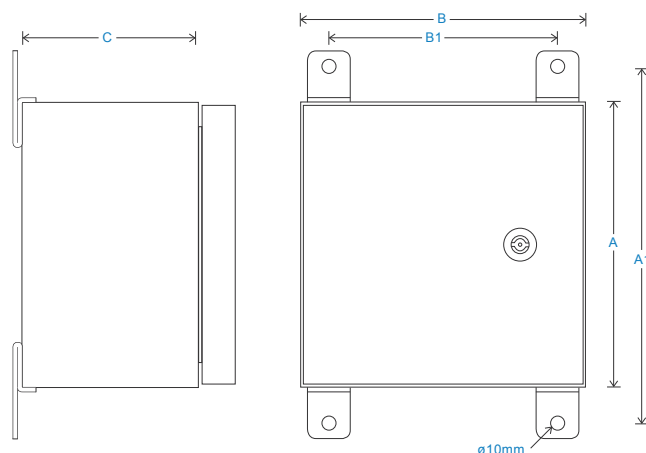

dimensions to be specified in 'how to order' table

## Technical Performance

Inputs	Via accelerometer	Door	Twist Handle
Output	BNC as standard (TNC as alternative)	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
Material	Mild Steel painted		Single input M12 - ø3.5-7mm cable
	RAL 7042 as standard		Single input M20 - ø7-13mm multi-core cable
Dimensions	see: 'How To Order' table		Multi input M20 - 3 x ø5.3mm
Sealing	IP66	Labelling	Channel locations - other
Termination	Klippon Type		labelling available upon request
		Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

## How To Order

