


Painted Mild Steel

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

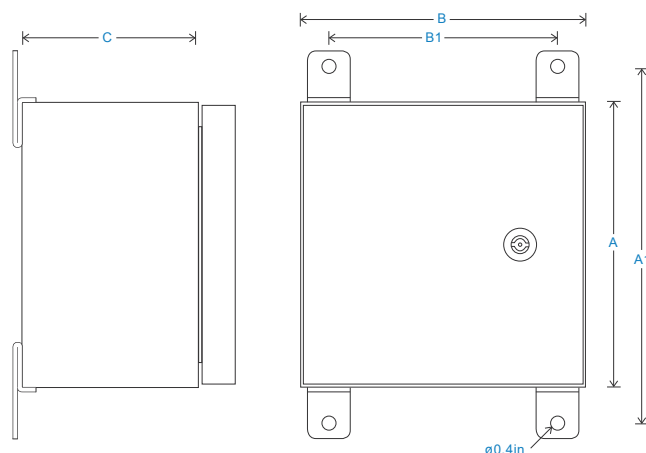

dimensions to be specified in 'how to order' table

Inputs	Via accelerometer	Door	Twist Handle
Output	BNC as standard (TNC as alternative)	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
Material	Mild Steel painted		Single input M12 - \varnothing 0.1-0.3in cable
	RAL 7042 as standard		Single input M20 - \varnothing 0.3-0.7in multi-core cable
Dimensions	see: 'How To Order' table		Multi input M20 - 3 x \varnothing 0.2in
Sealing	NEMA 4X	Labelling	Channel locations - other
Termination	Klippon Type		labelling available upon request
		Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

Product Prefix
HS - Hansford Sensors

Options (if required)
C - Compact design

M - PCB Board Connection

H **S** **C** **E** **X** **X** **X** **X** **X** **X** **X** **M**

Product Series
CE - Connection Enclosure

Channels	Dimensions (in inches)				
	A	B	C	A1	B1
001-012	8 x	8 x	6	(10,	6.3)
009-024	8 x	12 x	6	(10,	10.3)

(others available on request)

Options (BNC as default)
TNC - Output: TNC Connector



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

