


HS-SE-DT-PC Switching Enclosure

Polycarbonate - vibration and temperature output

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Dual output for vibration and temperature
- Multiple outputs via one connector

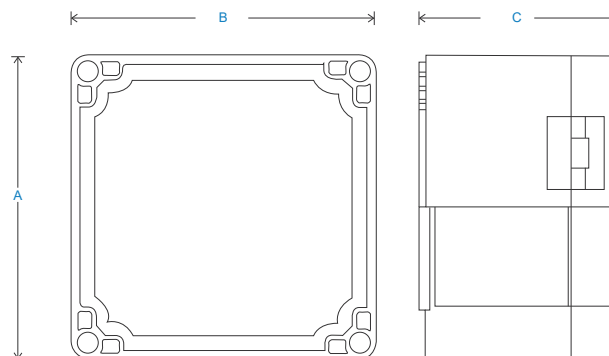

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via dual output vibration and temperature accelerometer	Door	Catches
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Single input M12 - $\varnothing 0.1-0.3$ in cable
Material	Polycarbonate		Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Dimensions	see: 'How To Order' table	Labelling	Multi input M20 - 3 x $\varnothing 0.2$ in
Sealing	NEMA 4X	Mounting	Channel locations - other
Termination	Din rail terminals wired to switch	EMC	labelling available upon request
			supplied are 4 x Brackets
			EN61326-1:2013

How To Order

