


# HS-SE-DT Switching Enclosure

Stainless Steel - vibration and temperature output

## Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Dual output for vibration and temperature
- Multiple outputs via one connector

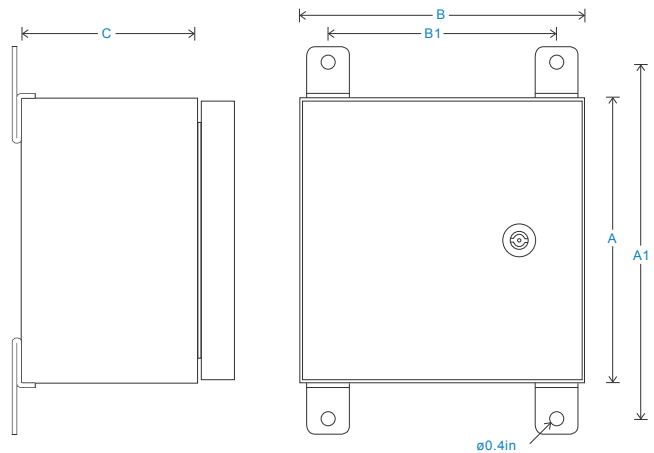

dimensions to be specified in 'how to order' table

## Technical Performance

Inputs	Via dual output vibration and temperature accelerometer	Door	Lock and polyamide key
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Holes are punched for: Single input M12 - $\varnothing 0.1-0.3$ in cable Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable Multi input M20 - 3 x $\varnothing 0.2$ in
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Labelling	Channel locations - other labelling available upon request
Dimensions	see: 'How To Order' table	Mounting	supplied are 4 x Brackets
Sealing	NEMA 4X	EMC	EN61326-1:2013
Termination	Din rail terminals wired to switch		

## How To Order

