


HS-CE-PCM Connection Enclosure

Polycarbonate

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

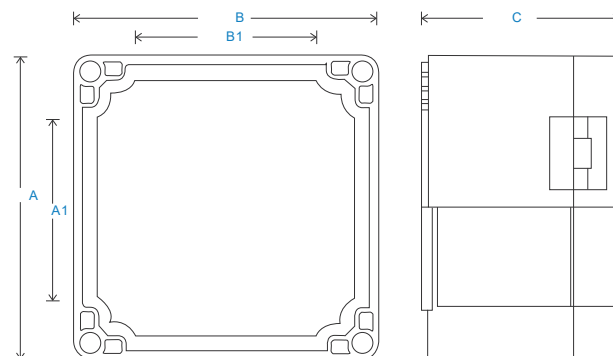

Technical Performance

Inputs	Via accelerometer	Door	Catches
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	PCB Mounted		Holes are punched for:
Material	Polycarbonate (to be specified in options of 'How To Order' table)	Single input M12 - $\varnothing 0.1-0.3$ in cable	Single input M20 - $\varnothing 0.3-0.5$ in multi-core cable
Dimensions	see: 'How To Order' table	Multi input M20 - 3 x $\varnothing 0.2$ in	Channel locations - other
Sealing	NEMA 4X	Labelling	labelling available upon request
Termination	Spring loaded terminal	Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

